INDOOR CATALOGUE
2025-26

FEEL THE LIGHT NOT THE SOURCE

OBEN®

We are **OBEN**

Since our inception in 2002, we have been a leading dealer of lighting products, proudly contributing to numerous prestigious projects across India. Over the past 15 years, we have partnered with various clients, delivering innovative and challenging solutions tailored to their unique needs.

The lighting industry has undergone a significant transformation with the advent of LED technology, leading to a surge in demand for high-quality lighting solutions. To navigate the competitive market, we utilize advanced testing equipment to ensure our products meet the highest quality standards.

In 2007, we partnered with renowned global companies to introduce world-class lighting products under our brand, **OBEN.** We are committed to using only the finest raw materials and components to manufacture our luminaires.

With 18 years of industry experience, we collaborate closely with our clients to provide economical and energy-efficient lighting solutions. To reinforce our commitment to quality, we offer a 5-year warranty on all our luminaires.

At **OBEN,** customer satisfaction is our top priority, and we consider it our greatest reward.




Our Vision & Commitment

To be a global leader in innovative and sustainable lighting solutions, illuminating spaces while enhancing energy efficiency and customer satisfaction.

At **OBEN,** we are committed to delivering high-quality, energy-efficient lighting products that meet the evolving needs of our clients. We strive to innovate and collaborate with industry leaders to ensure our offerings set the standard for excellence in the lighting industry. Our mission is to empower our customers with smart lighting solutions backed by our expertise, a strong warranty, and unparalleled customer service.

Working Flowchart

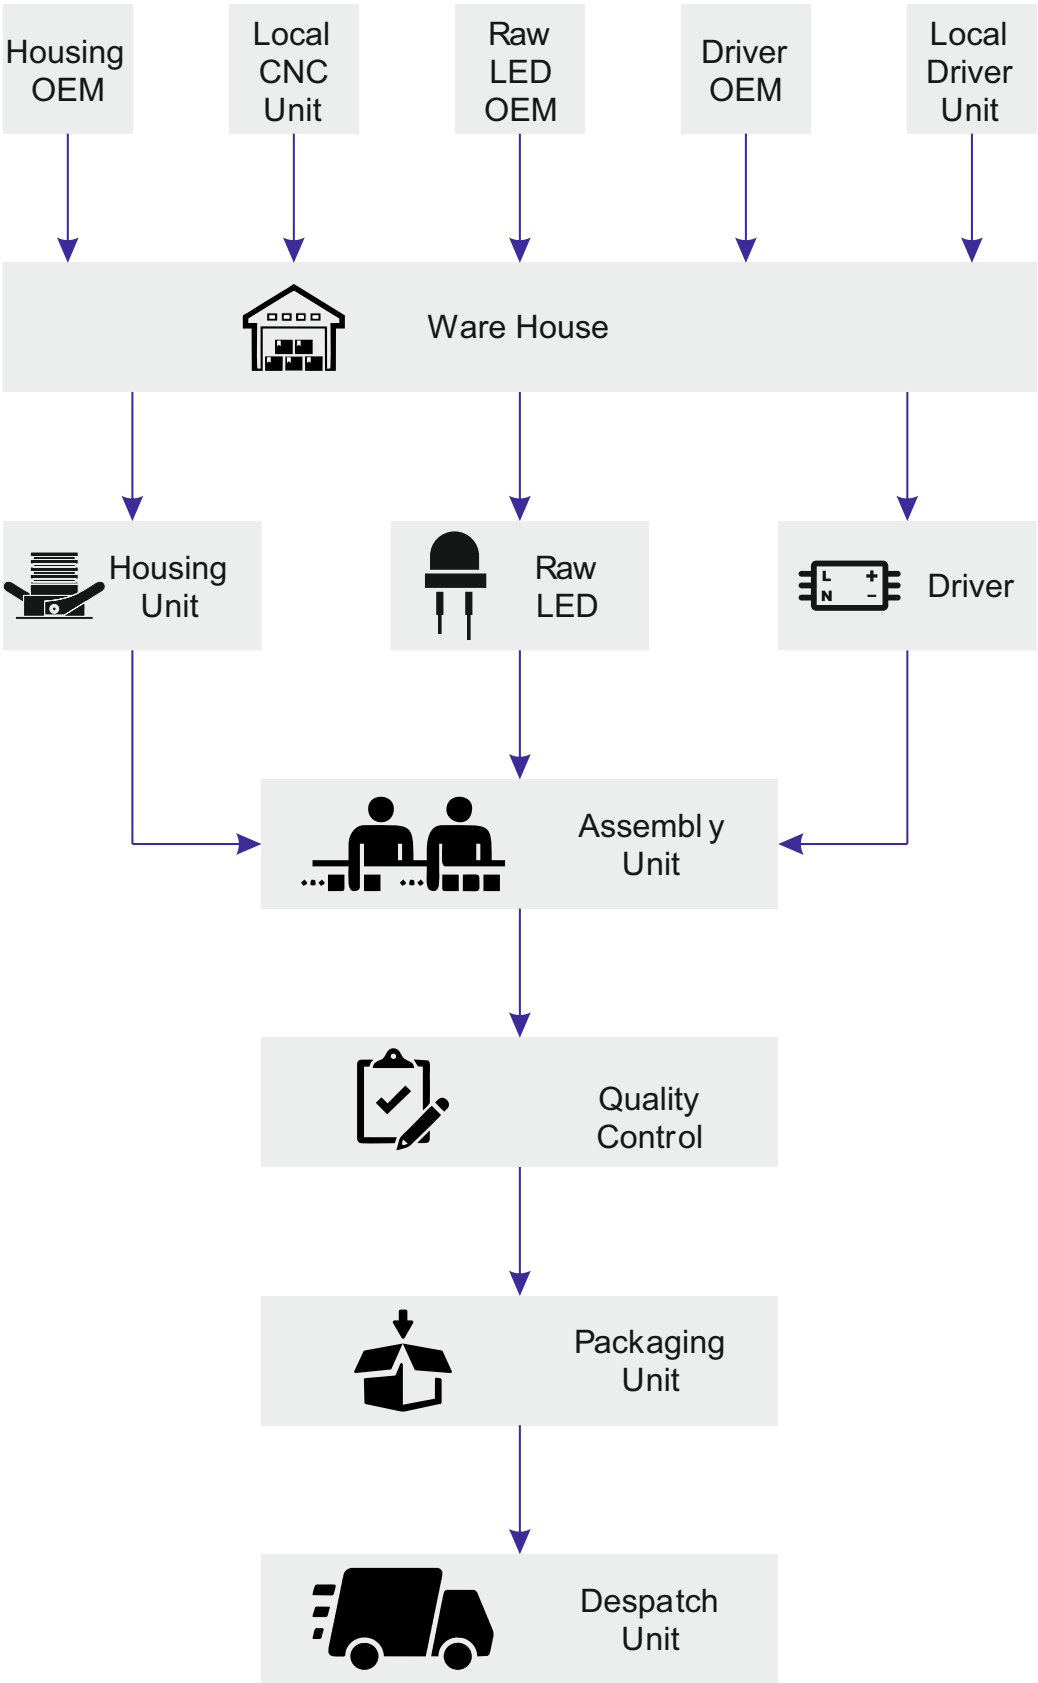

Our OEM Partners

TRIDONIC (Serbia)




Tridonic is the world's leading high quality manufacturer for Indoor and Outdoor Drivers having units in various countries.

CREE (USA)



CREE is one of leading global manufacturer of variable LEDs, COB and SMD. Our all SMD based PCBs are incorporated with CREELEDswith CRI>85

MEAN WELL (Taiwan)

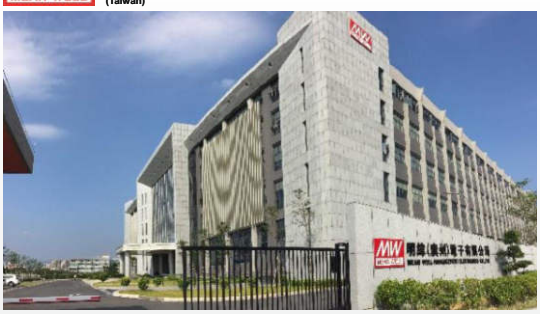

MEAN WELL is a taiwan based company manufacturing world's best power supplies for LEDs for more than three decades. Our outdoor luminares are equipped with MEAN WELL IP65 drivers.

OSRAM (Germany)



VOSSLOH SCHWABE is a German based company producing highly efficient COB and Electronic Control Systems with backup warranty of 5 years.

carclo plc (UK)



VOSSLOH SCHWABE is a German based company producing highly efficient COB and Electronic Control Systems with backup warranty of 5 years.


LEDiL (Finland)



VOSSLOH SCHWABE is a German based company producing highly efficient COB and Electronic Control Systems with backup warranty of 5 years.

Color Temperatrure Consistency

OBEN knows well the requirement for color temper ature consistenc y for the quality lighting and also faces the phenomenon of Inconsistenc y In terms of color temper ature in market. It Is a headache of designers and the consumers. F or this purpose, OBEN applies the LED chips at high consistenc y (SDCM 3) from the quality chips manufacturers. All LED chips are sorted out, st ored and pr ocessed in strict and scientific criterion t o guar antee the LED chip in consistenc y in one batch.

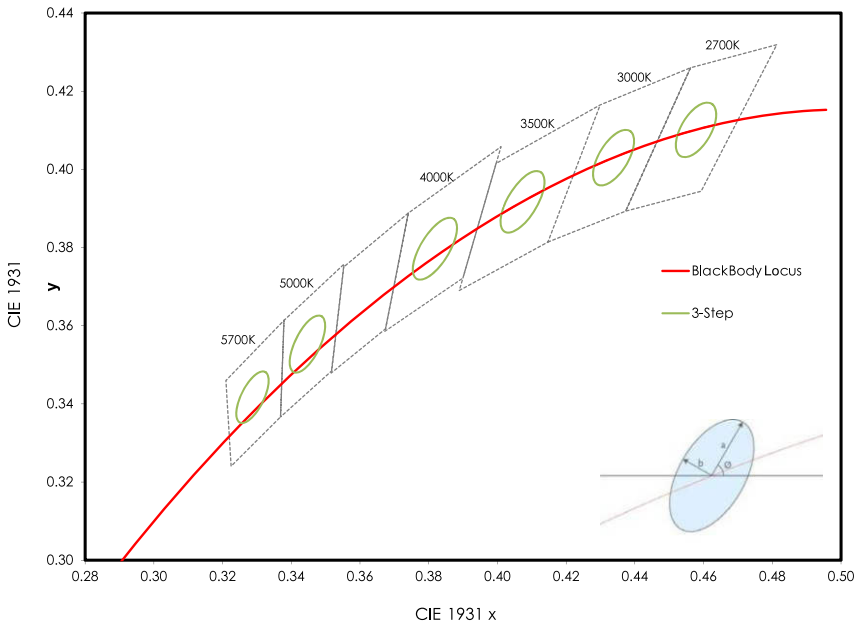

3-step MacAdam ellipse color bins.

In the study of color vision, MacAdam ellipses refer to the region on a chromaticity diagr am which contains all colors which are indistinguishable, to the average human eye, from The color at the center of the ellipse. The cont our of The ellipse therefore represents the just noticeable differences of chromaticity .

Procedure

MacAdam set up an experiment in which a trained observer viewed tw o different colors, at a fixed luminance of about 48 cd/m2. One of the colors the "test' color) was fixed, but the other was adjustable by the observer, and the observer was asked to adjust that color until it matched the test color .This match was, of course, not perfect, since the human eye, like any other instrument, has limited accur acy. It was found by MacAdam, howe ver, that all of the matches made by the observer fell into an ellipse on the CIE 1931 chromaticity diagr am. The measurements were made at 25 points on the chromaticity diagr am, and it was found that the size and orientation of the ellipses on the diagr am varied widel y depending

on the test color . These 25 ellipses measured by MacAdam, for a particular observer are shown on the chromaticity diagr am above.

Extension to three dimensions

A more gener al concept is that of "discrimination ellipsoids" in the entire three-dimensional color space, which would include the ability of an observer to discriminate between tw o different luminances of the same color . Such measurements were carried out, among others, by Brown and MacAdam in 1949, Davidson in 1951, Brown in 1957, and by Wyszecki and Fielder in 1971. It was found that the discrimination ellipsoids yielded relativel y unchanging discrimination ellipses in chromaticity

space for luminances between 3 and 30 cd/m2.

Effects in color theory

MacAdam's results confirmed earlier suspicions that color difference could be measured using a metric in a chromaticity space. A number of attempts have been made to define a color space which is not as distorted as the CIE XYZ space. The most notable of these are the CIELUV and CIELAB color spaces. Although both of these spaces are less distorted than the CIE VZ space, they are not completel y free of distortion. This means that the MacAdam ellipses become nearly (but not exactl y) circular in these spaces.

Color Temperatrure Consistency



COB (chip-on-boar d) gener ates the light evenly over the surface like that of incandescent lamp without double image. The light gener ated from the fitting with COB makes the subject look natural and clean while fitting with single-LED-chip has double image.

natural light



Fitting with COB gener ates the lights even and soft, making the subject natur al and clean and consequentl y creating strong stereoscopic feel.

saw-toothed double light image




Fitting with single-LED-chip gener ates the lights from the scattered chips,making the subject blur and unclear in boundary with double image and consequentl y creating weak stereoscopic feel.

Advanced optical technology

OBEN series are developped by adopting world top-class optics technology and processed in scientific and strict techniques to guarantee the optical quality of this series. Consequentl y, OBEN series had accur ate light distribution and high light output and even and soft light while no dark dot, dark area and halo.



Even light with natur al halo



Uneven light with dark dot and area



Unclean boundary with str ay and virtual image

High CRI

OBEN series adopt world top class LED chip.
High color rendering with Ra >90 makes the subject natural and fresh while few LED products can do so at present.
Lighting in high power & high CRI makes the subject outstand in color and material feature, and thus perfectl y reflecting the colors of the subject and of human beings.
It is an idea lighting solution for the boutiques and important social activities places etc..

Ra95
High CRI




Ra90
Moderate CRI



Ra80
Standard CRI



Average Ra evaluation index.

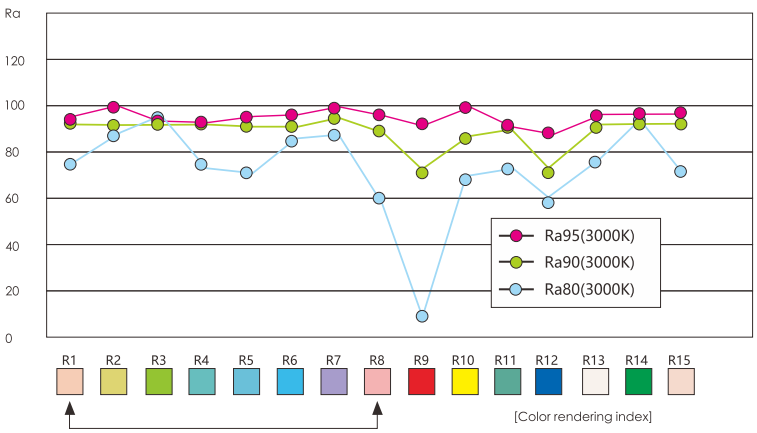

Average color rendering index ranges from R1 to R8
Eight kinds of color rendering index average

Ra Evaluation Index is applied to estimate the color rendering index of the lighting product to see the reflection level of natural color compared to those by conventional lightings.


High quality means authentic lighting

An advanced professional lighting solution provides for "non-manipulative, authentic" illumination of goods and brands.
First-class colour rendering enhances any product ' s brilliance, harmonizing content and intention.
The advanced LED technology incorpor ated in KC series produces the right light even for fine textures and materials.
KC series adopts world-top COB and incorporates latest advanced technology to further enhance the light efficiency and perfect CRI.



Gentle lighting for delicate goods

The LED light spectrum contains virtuall y no radiation in the infrared and ultraviolet regions, which can damage or fade sensitive goods while conventional halogen and HID light contains strong radiation in the infrared and ultraviolet.
This means that, besides excellent lighting quality, KC series also meets all the requirements for providing gentle lighting without having to use additional filters.

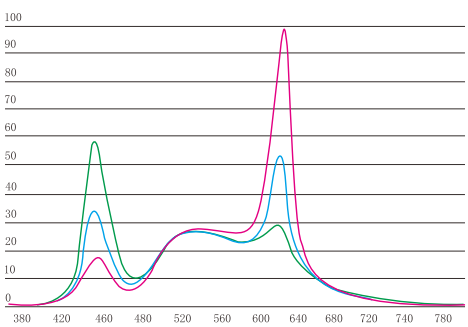

CONTENTS

RECESSED FIXED


DOT
P 12


POINT
P 13



DEW
P 14


IRIS
P 15



DOT UNO
P 16


DOT TRIO
P 17


DOT QUINT
P 18


DOT QUINT TRIMLESS
P 19


BOXY
P 20


BOXY TRIMLESS
P 21


SLICE
P 22



SLICE TRIMLESS
P 23


LUMO
P 25


COUNTER
P 26


LUMAX
P 27


DARK
P 29


GHOST
P 30


ELEGANT
P 32


CAVE TRIMLESS
P 33


SHOWER
P 36



PEARL
P 37


CAVE
P 38


CROWN
P 39


MAXGLO
P 40


COZY
P 41


COMFORT
P 42

RECESSED ADJUSTABLE


NANO
P 44


CABI
P 45


SOFT
P 46


CAT'S EYE
P 47


MIG
P 48


LUMO D
P 49


ADORA
P 50


STYLO TRIMLESS
P 451


SPILL
P 52


WINKEY
P 53


CROWN D
P 54


KENDO RD
P 57


KENDO RD TRIMLESS
P 58


KENDO RD WASH
P 59

KENDO SQ
P 60

KENDO SQ TRIMLESS
P 61

KENDO SQ WASH
P 62

KENDO DUO
P 63

GIMBLE UNO
P 64

GIMBLE DUO
P 655

MAXGLO D
P 66

SURFACE MOUNT



VERSA
P 68



PATON RD
P 70



PATON SQ
P 71



CLARION
P 73



OSCAR
P 74



ZEN
P 75



AXIS
P 77



BARREL
P 78



AURO
P 80

LED STRIP



2216 SERIES
P 82



2835 - FULL SPECTRUM
P 84



2835 - HIGH LUMEN SERIES
P 86




6060 LENS
P 88



DOTLESS COB
P 90

NEON TOP BEND



SN105220-0606
P 93




SN105221-1615
P 94




SN105222-1212
P 96

NEON SIDE BEND




SN105223-0612
P 98




SN105224-1220
P 99

NEON 3D BEND



SN105225-1615-3D
P 101

TR 25 SERIES



ACCESSORIES
P 105



FLOOD LIGHT
P 106



GRILLE LIGHT
P 107



HONEYCOMB GL
P 108




FOLDING FL
P 109



FOLDING GL
P 110



SPOT ZOOMABLE
P 111



TUBO LIGHT
P 112




HOSE LIGHT
P 113



WALL LAMP
P 114



PENDANT ZOOM
P 115



PENDANT LIGHT
P 116



PENDANT ZOOMABLE
P 117

INDOOR

Recessed **Fixed**

Dot

TECHNICAL DATA

MOUNTING
Mounting location: Ceiling
Type: Recessed

ELECTRICAL
Voltage : 220V
Frequency : 50/60Hz

DIMENSION
Dia : 21 mm
Height : 25 mm
Cut out : 19 mm

LIGHT
Adjustibility : Fixed
Unified glare rating(UGR) : <14

LAMP DESCRIPTION
Lamp type : SMD
Colour rendering index (CRI) : Ra>90
MacAdam : <3
LED Llife : L80B20-50000 Hrs
Environment temperature: -20℃~40℃
Ingress protection: IP44

NOMINAL FLUX
3000K: 1W 82lm
4000K: 1W 95lm
5000K: 1W 110lm


PRODUCT DESCRIPTION

CNC-made spotlight is a precision-engineered, compact lighting fixture designed for focused illumination. It features a durable CNC-machined body, often crafted from aluminum, ensuring excellent heat dissipation and long-lasting performance. With a 1-watt LED light source, it provides bright, concentrated light while maintaining energy efficiency. Ideal for accent lighting in various applications, this spotlight offers a sleek, modern design and reliable functionality.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF
OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee

Finish: Matt white, Matt black


IP	CRI	<3
44	Ra90	SDCM


UGR<19, Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF100301	1W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 45°	☐ White ☐ Black	☐ On-Off	☐ 20 ☐ 44


15°





45°





Point

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	40 mm
Height :	27 mm
Cut out :	35 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 2W 145lm
4000K: 2W 172lm
5000K: 2W 186lm


PRODUCT DESCRIPTION

CNC-made spotlight is a precision-engineered, compact lighting fixture designed for focused illumination. It features a durable CNC-machined body, often crafted from aluminum, ensuring excellent heat dissipation and long-lasting performance. With a 2-Watt LED light source, it provides bright, concentrated light while maintaining energy efficiency. Ideal for accent lighting in various applications, this spotlight offers a sleek, modern design and reliable functionality.

PHOTO



DIMENSIONS



Color Temperature 3000K | 4000K | 5000K

CONTROL PROTOCOL

ON/OFF

Finish

Matt white | Matt black


IP	CRI	<3
20	Ra90	SDCM


UGR<19 Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF100202	2W	3000K | 4000K | 5000K	90 | 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	On-Off	20


15°







24°





36°





Dew

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	30 mm
Height :	20 mm
Cut out :	11 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP44

NOMINAL FLUX

3000K: 1W 78lm
4000K: 1W 89lm
5000K: 1W 102lm


PRODUCT DESCRIPTION

Discover our tiny recessed spot light, engineered with a narrow light source to deliver precise and vibrant illumination. Ideal for accentuating artwork, highlighting architectural features, or creating a cozy ambiance in any room. Its compact design seamlessly blends into ceilings, providing an unobtrusive yet stylish lighting solution perfect for modern interiors.

PHOTO



DIMENSIONS



Color Temperature 3000K | 4000K | 5000K

CONTROL PROTOCOL

ON/OFF

Finish


Matt white | Matt black


UGR<19 Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF100101	1W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 36° ☐ 60°	☐ White	☐ On-Off	☐ 44


36°





60°





Iris

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	60 mm
Height :	69 mm
Cut out :	45 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP44

NOMINAL FLUX

3000K: 4.3W 312lm
4000K: 4.3W 335lm
5000K: 4.3W 344lm


PRODUCT DESCRIPTION

Unique recessed downlight featuring a deep light source that effectively minimizes glare. With a power consumption of just 4.3 watts, it delivers efficient illumination while enhancing aesthetics. The sleek design integrates seamlessly into any ceiling, making it ideal for modern spaces while providing a warm, inviting light. Perfect for residential and commercial applications.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish


Matt white | Matt black


UGR<19 Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF100405	4.3W	¨ 3000K ¨ 4000K ¨ 5000K	¨ 90 ¨ 95	¨ 15° ¨ 36°	White	¨ On-Off ¨ 0-10 ¨ DALI ¨ ZIGBEE	44


15°





36°





Dot Uno

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT


Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

PHOTO





NOMINAL FLUX

3000K: 3W 222m
4000K: 3W 245lm
5000K: 3W 268lm

PRODUCT DESCRIPTION

Die Cast Aluminum Spotlight, crafted with a sleek and compact design. This innovative lighting solution features a deep source baffle to effectively minimize glare, providing a focused beam of light. Perfect for indoor use, it combines durability and style, enhancing any space with minimal disruption.

DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White


Color Temperature

3000K | 4000K | 5000K

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105003	3W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off	☐ 20

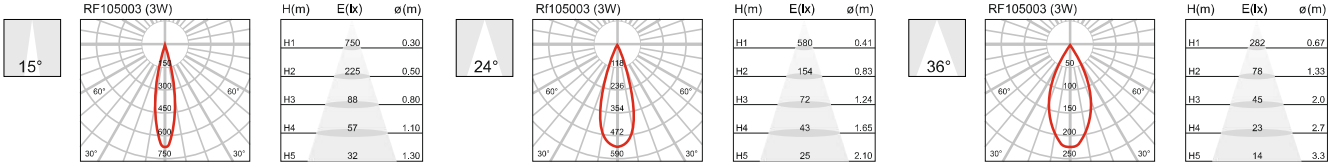

Dot Trio

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX


3000K: 6.2W 458lm
4000K: 6.2W 504lm
5000K: 6.2W 556lm

PRODUCT DESCRIPTION

Die Cast Aluminum Spotlight, crafted with a sleek and compact design. This innovative lighting solution features a deep source baffle to effectively minimize glare, providing a focused beam of light. Perfect for indoor use, it combines durability and style, enhancing any space with minimal disruption.

PHOTO





DIMENSIONS

RECOMMEND:

ON/OFF

Color Temperature

3000K | 4000K | 5000K


Finish

White

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
Rf105209	6.2W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off	☐ 20



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Dot Quint

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP20

NOMINAL FLUX


3000K: 13W 962lm
4000K: 13W 1058lm
5000K: 13W 1164lm

PRODUCT DESCRIPTION

Die Cast Aluminum Spotlight, crafted with a sleek and compact design. This innovative lighting solution features a deep source baffle to effectively minimize glare, providing a focused beam of light. Perfect for indoor use, it combines durability and style, enhancing any space with minimal disruption.

PHOTO





DIMENSIONS

RECOMMEND:

ON/OFF

Color Temperature

3000K | 4000K | 5000K


Finish

White

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105413	13W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off	☐ 20



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Dot Quint Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 13W 962lm
4000K: 13W 1058lm
5000K: 13W 1164lm


PRODUCT DESCRIPTION

Trimless / Borderless Design Spotlight. Featuring a compact build and an anti-glare baffle, this lighting solution offers a clean, unobtrusive look while delivering precise illumination. Ideal for modern interiors, it enhances your space with a minimalist touch, providing both style and functionality without visual distractions.

PHOTO



120 x 25 mm



DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White


Color Temperature

3000K | 4000K | 5000K

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105613	13W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White	☐ On-Off	☐ 20



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Boxy

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX


3000K: 12W 816m
4000K: 12W 898lm
5000K: 12W 987lm

PRODUCT DESCRIPTION

Die Cast Aluminum Spotlight, crafted with a sleek and compact design. This innovative lighting solution features a deep source baffle to effectively minimize glare, providing a focused beam of light. Perfect for indoor use, it combines durability and style, enhancing any space with minimal disruption.

PHOTO





DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White


Color Temperature

3000K | 4000K | 5000K

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105312	12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off	☐ 20



-

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Boxy Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT


Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP20

PHOTO





NOMINAL FLUX

3000K: 3W 222m | 6.2W 458lm | 13W 962lm
4000K: 3W 245lm | 6.2W 504lm | 13W 1058lm
5000K: 3W 268lm | 6.2W 556lm | 13W 1164lm

PRODUCT DESCRIPTION

Trimless / Borderless Design Spotlight. Featuring a compact build and an anti-glare baffle, this lighting solution offers a clean, unobtrusive look while delivering precise illumination. Ideal for modern interiors, it enhances your space with a minimalist touch, providing both style and functionality without visual distractions.

DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White


Color Temperature

3000K | 4000K | 5000K

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105512	12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off	☐ 20



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Slice

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP20

NOMINAL FLUX


3000K: 17W 821lm
4000K: 17W 905lm
5000K: 17W 1020lm

PRODUCT DESCRIPTION

Unique Compact Wall Washer, designed to highlight the beauty of your walls. This innovative fixture provides even, soft illumination that enhances textures and colors, creating a captivating ambiance. Perfect for art displays or architectural features, it combines functionality with elegance, making every wall a stunning focal point.

PHOTO





DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White


Color Temperature

3000K | 4000K | 5000K

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105717	17W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ Diffused	☐ White	☐ On-Off	☐ 20



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Slice Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT


Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

PHOTO





NOMINAL FLUX

3000K: 17W 821lm
4000K: 17W 905lm
5000K: 17W 1020lm

PRODUCT DESCRIPTION

Trimless Wall Washer, designed for a seamless finish that enhances any wall's beauty. This compact fixture provides soft, uniform lighting that highlights textures and colors without visible borders or distractions. Perfect for modern spaces, it delivers a clean, sophisticated look while illuminating your walls to perfection.

DIMENSIONS

RECOMMEND:

ON/OFF

Color Temperature

3000K | 4000K | 5000K


Finish

White

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105817	17W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ Diffused	☐ White	☐ On-Off	☐ 20



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Deepest Cut-off Angle Creates Comfortable Lighting

The AXE deep anti-glare downlight is designed with a mini body and deep recessed light source, which can reduce effective eye irritation, providing soft and even lighting, and providing a comfortable lighting environment.



Deep Source

This deep-sourced LE spotlight is designed with a black anti-glare baffle, providing directed illumination while preventing distractions from glare.



Mini Size

Compact and powerful, this 45 mm diameter spotlight delivers up to 8 watts of brilliant illumination for any lighting need.

Lumo

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	42 mm
Height :	68 mm
Cut out :	45 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 5W 325lm | 8W 496lm
4000K: 5W 348lm | 8W 516lm
5000K: 5W 362lm | 8W 528lm


PRODUCT DESCRIPTION

Innovative heat sink design optimizes space while delivering high output performance in both 5-watt and 8-watt options. Engineered for efficient heat dissipation, it ensures longevity and consistent brightness. Ideal for compact fixtures, this design enhances both residential and commercial lighting solutions—combining power with elegance in any setting.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 | Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SP6157F	☐5W☐8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

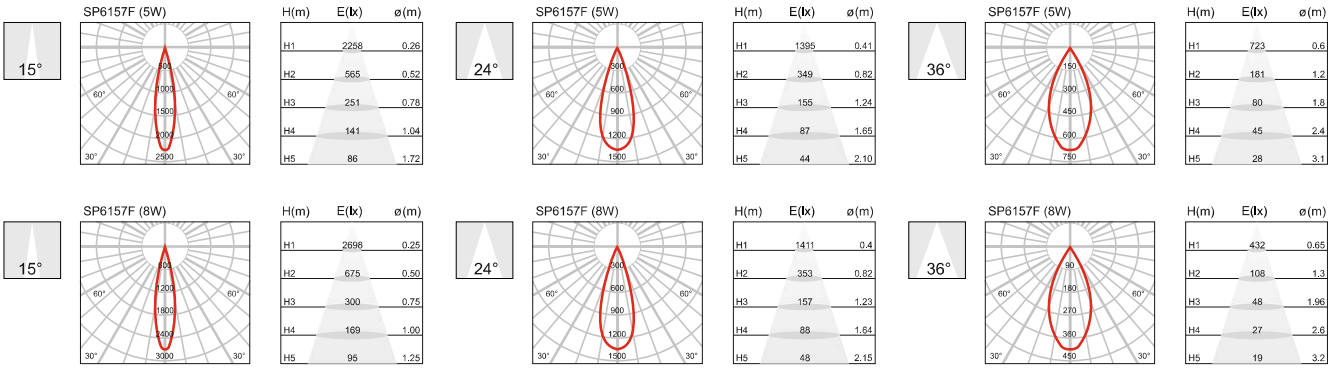

Counter

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	59 mm
Height :	70 mm
Cut out :	54 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP 20 / IP44

NOMINAL FLUX

3000K: 5W 325lm | 7W 434lm
4000K: 5W 348lm | 7W 452lm
5000K: 5W 362lm | 7W 464lm


PRODUCT DESCRIPTION

Illuminate your space with precision and style using our 5W and 7W Deep Source Spot Lights, designed for both functionality and aesthetics. These spot lights are engineered to deliver powerful, focused illumination while maintaining a low Unified Glare Rating (UGR) for a comfortable and visually pleasing environment.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 | Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF 100406	☐ 5W☐7W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

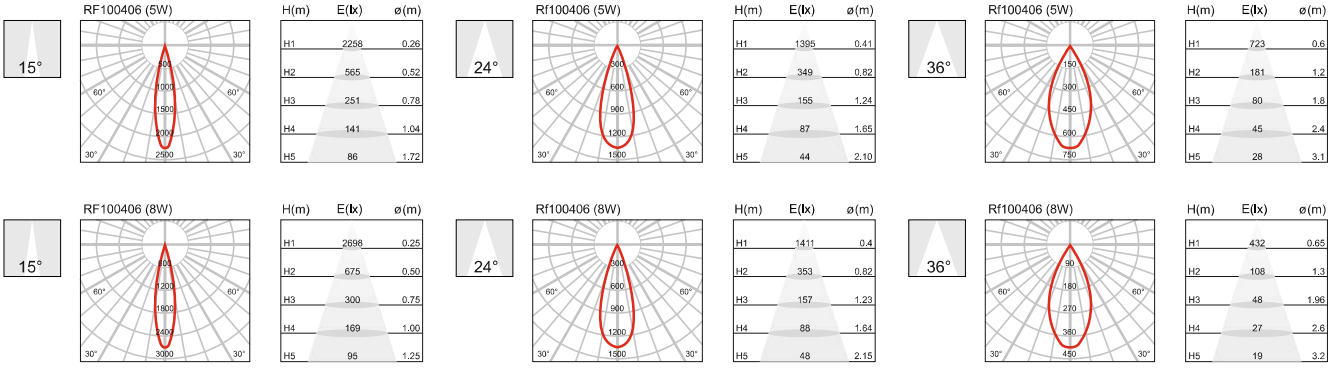

Lumax

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

	7W	12W
Dia :	55 mm	65 mm
Height :	74 mm	88 mm
Cut out :	45 mm	55 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP 20 / IP44

NOMINAL FLUX

3000K: 7W 546lm | 12W 852lm
4000K: 7W 562lm | 12W 871lm
5000K: 7W 589lm | 12W 894lm


PRODUCT DESCRIPTION

Transform any environment with the Lumax 7W and 12W Spot Lights. Designed to deliver superior illumination, these spot lights combine high lumen output with a deep light source and advanced anti-glare features. The CNC-machined construction ensures both durability and a modern aesthetic, making the Lumax spot lights an ideal choice for enhancing the visual appeal and functionality of residential and professional spaces.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF


OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish: Matt white | Matt black

UGR<19 | Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF 100507	7W	☐3000K☐4000K☐5000K	☐90☐95	☐15°☐24°☐36°	☐White☐Gun Black	☐On-Off☐0-10☐DALI☐ZIGBEE	☐20☐44
RF 100612	12W	☐3000K☐4000K☐5000K	☐90☐95	☐15°☐24°☐36°	☐White☐Gun Black	☐On-Off☐0-10☐DALI☐ZIGBEE	☐20☐44

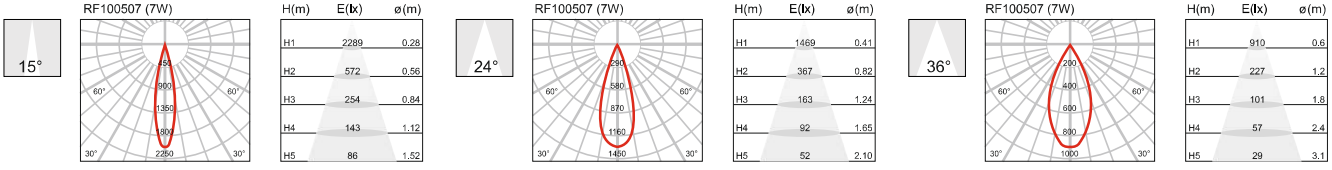

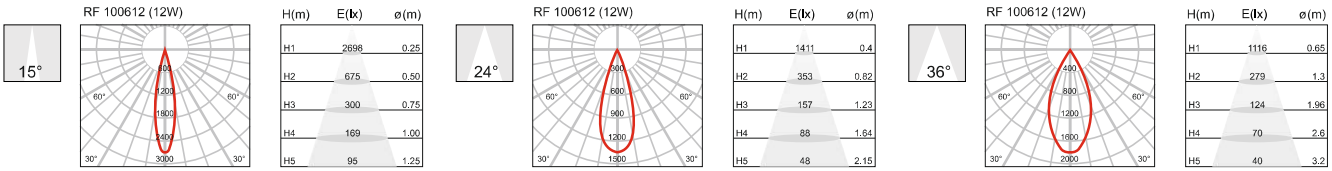

DARK

The DARK series is a very good product that can see light,
but can't see the lamps. Like a black hole in the universe,
it looks dim, but it actually glows.
DARK can create a special light environment for you.
Look up and see no light, but illuminated objects are vibrant and bright.
It's great for specific objects, such as art or home furnishings.
The DARK series is available in 3W, 7W and 12W.
The minimum outer diameter is
Ø35mm and the maximum is Ø65mm.

IP20 | Anti-glare | DC | | CE | | RoHS

Dark

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

	5W	7W	12W
Dia :	42 mm	64 mm	75 mm
Height :	57 mm	58 mm	75 mm
Cut out :	35 mm	55 mm	65 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP 20 / IP44

NOMINAL FLUX

3000K: 5W 325lm | 7W 455lm | 12W 816lm
4000K: 5W 350lm | 7W 504lm | 12W 888lm
5000K: 5W 375lm | 7W 532lm | 12W 984lm


PRODUCT DESCRIPTION

Enhance your environment with our recessed spotlight, designed with anti-glare technology and a compact light source. Achieving excellent UGR levels, this fixture provides comfortable, energy-efficient illumination. Ideal for residential and commercial spaces, it seamlessly blends into ceilings while delivering powerful lighting, creating a warm and inviting atmosphere.

PHOTO



DIMENSIONS

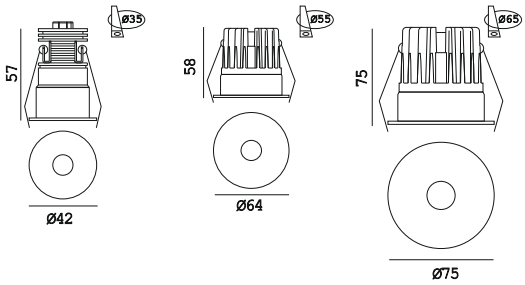

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 | Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF102505	5W	☐3000K☐4000K☐5000K	☐90☐95	☐24°☐36°	☐White	☐On-Off☐0-10☐DALI☐ZIGBEE	☐20☐44
RF102507	7W	☐3000K☐4000K☐5000K	☐90☐95	☐24°☐36°	☐White	☐On-Off☐0-10☐DALI☐ZIGBEE	☐20☐44
RF102512	12W	☐3000K☐4000K☐5000K	☐90☐95	☐24°☐36°	☐White	☐On-Off☐0-10☐DALI☐ZIGBEE	☐20☐44

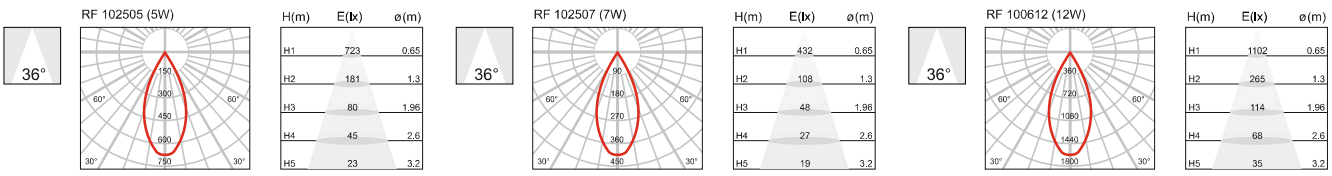

Ghost

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

	10W
Dia :	45 mm
Height :	86 mm
Cut out :	38 mm

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP 20 / IP44

NOMINAL FLUX

3000K: 10W 850lm
4000K: 10W 1050lm
5000K: 10W 1140lm


PRODUCT DESCRIPTION

Enhance your environment with our recessed spotlight, designed with anti-glare technology and a compact light source. Achieving excellent UGR levels, this fixture provides comfortable, energy-efficient illumination. Ideal for residential and commercial spaces, it seamlessly blends into ceilings while delivering powerful lighting, creating a warm and inviting atmosphere.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish


Matt white | Matt black


UGR<19 | Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF102410	10W	☐3000K☐4000K☐5000K	☐90☐95	☐24°☐36°	☐White☐Gun Black	☐On-Off☐0-10☐DALI☐ZIGBEE	☐20☐44


24°





36°









Elegant series with unique design shape:
special heat sink + special cap.
Super quality aluminum makes its heat dissipation is very good.
Various colors are made by high-end
electroplate and oil painting make the
whole light touch feel very good.
The deep anti glare design makes it especial for
some no main light solutions.

Elegant





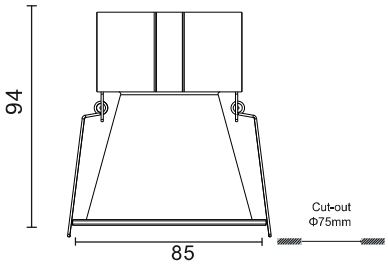


RF1015207-7W

Power	8W/10W
Beam angle	15°/24°/36°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	88lm/W
Color rendering index	≥90
Operating temperature	-25°C~50°C
Rated life (hours)	50000h LM80
LED chip	COB


RF1015315-10/15W

Power	10W/15W
Beam angle	15°/24°/36°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	88lm/W
Color rendering index	≥90
Operating temperature	-25°C~50°C
Rated life (hours)	50000h LM80
LED chip	COB




RF1015207-7W-24°

H(m)	E(lx)	D(cm)
1	3124	40
2	781	81
3	347	121
4	195	162
5	125	202




RF1015207-7W-36°

H(m)	E(lx)	D(cm)
1	1641	67
2	410	133
3	182	200
4	103	267
5	66	334




RF1015207-7W-50°

H(m)	E(lx)	D(cm)
1	348	102
2	93	204
3	42	306
4	29	408
5	15	511




RF1015315-10W-24°

H(m)	E(lx)	D(cm)
1	2274	50
2	568	101
3	252	153
4	142	204
5	90	255




RF1015315-15W-24°

H(m)	E(lx)	D(cm)
1	4912	41
2	1228	83
3	545	125
4	307	167
5	196	209




RF1015315-10W-36°

H(m)	E(lx)	D(cm)
1	1372	68
2	343	137
3	152	205
4	85	275
5	54	342




RF1015315-15W-36°

H(m)	E(lx)	D(cm)
1	2695	65
2	673	131
3	299	197
4	168	262
5	107	328



RF1015315-10W-50°

H(m)	E(lx)	D(cm)
1	575	114
2	143	228
3	63	342
4	35	456
5	21	571



RF1015315-15W-50°

H(m)	E(lx)	D(cm)
1	698	10
2	174	204
3	78	306
4	44	408
5	29	511

Color Temperature

2700~6000K

2700K | 3000K | 3500K | 4000K

CONTROL PROTOCOL

ON/OFF

OTHER VERSIONS:

DALI | 1-10V | TRIAC

zigbee

Finish

Matt white | Matt black | Mirror black

UGR<19 | Fixed

Cave Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP 20 / IP44


NOMINAL FLUX


3000K: 7W 546lm
4000K: 12W 972lm
5000K: 18W 1512lm

PRODUCT DESCRIPTION

Introducing our rimless recessed spot light, expertly engineered for maximum light output. Its sleek, minimalist design seamlessly integrates into any ceiling, while the advanced anti-glare baffle ensures a comfortable illumination experience. Perfect for both residential and commercial spaces, this fixture combines style and functionality, enhancing your environment with superior lighting performance.

PHOTO

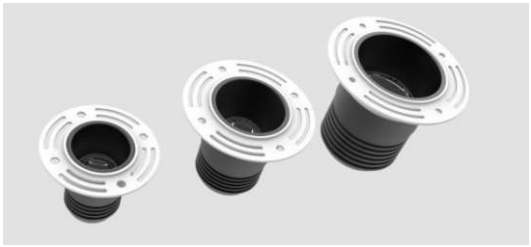

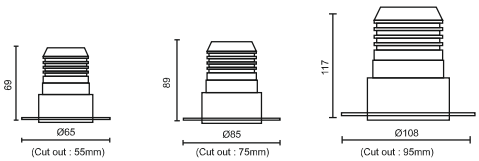

DIMENSIONS

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 | Fixed


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF102107	7W	□3000K□4000K□5000K	□90□95	□24°□50°	□Matt Black	□On-Off□0-10□DALI□ZIGBEE	□20□44
RF102212	12W	□3000K□4000K□5000K	□90□95	□24°□50°	□Matt Black	□On-Off□0-10□DALI□ZIGBEE	□20□44
RF102318	18W	□3000K□4000K□5000K	□90□95	□24°□50°	□Matt Black	□On-Off□0-10□DALI□ZIGBEE	□20□44




RF102107-7W-24°

H(m)	E(lx)	D(cm)
1	1639	36
2	410	71
3	182	107
4	103	142
5	78	177




RF102212-12W-24°

H(m)	E(lx)	D(cm)
1	2886	50
2	721	101
3	320	153
4	160	204
5	198	255




RF102318-18W-24°

H(m)	E(lx)	D(cm)
1	4010	43
2	1025	86
3	454	130
4	255	173
5	164	216




RF102107-7W-50°

H(m)	E(lx)	D(cm)
1	480	88
2	120	176
3	54	265
4	30	353
5	20	441



RF102212-12W-50°

H(m)	E(lx)	D(cm)
1	716	108
2	179	223
3	80	346
4	45	462
5	29	580





RF102318-18W-50°


H(m)	E(lx)	D(cm)
1	1510	91
2	381	176
3	172	264
4	98	352
5	62	446



Shower

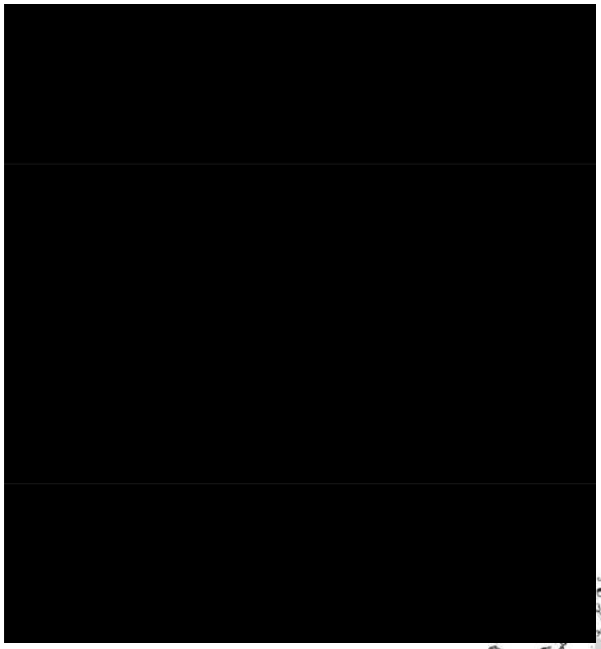

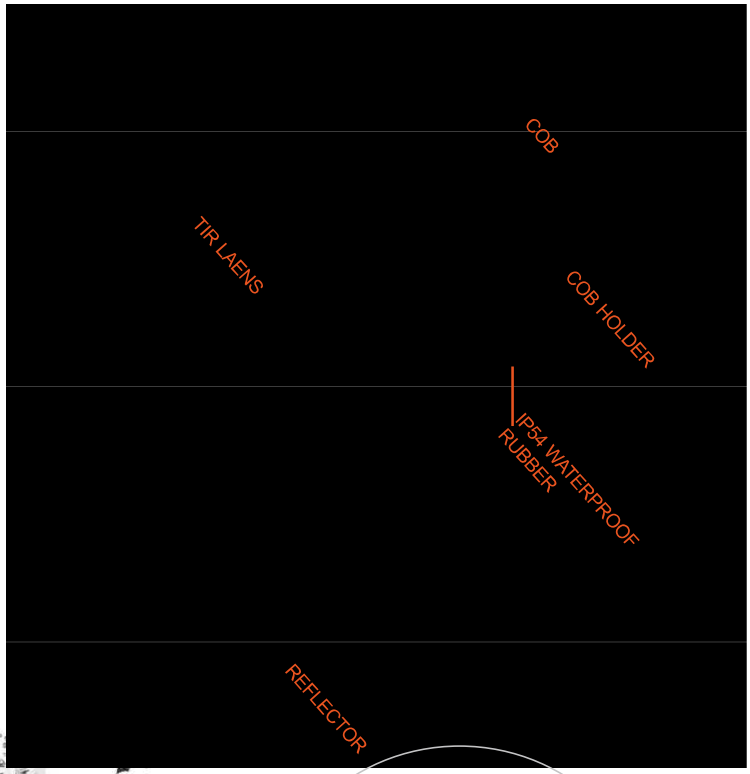

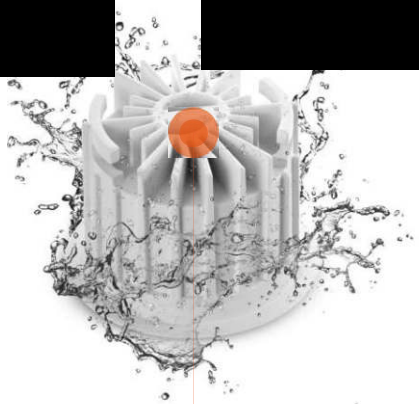

IP54

The anti-drag moisture-proof screw structure protects the power supply from damage




Sealed protective cover is dustproof, waterproof and moisture proof

SHOWER

SHOWER series of products have built-in fully sealed protective cover, anti-pull, the lamp, effectively prevent the invasion of external objects, moisture, spray, ensure that the lamp can be used normally in bad environment.

IP54 | Anti-dazzle | DC | | CE | | RoHS

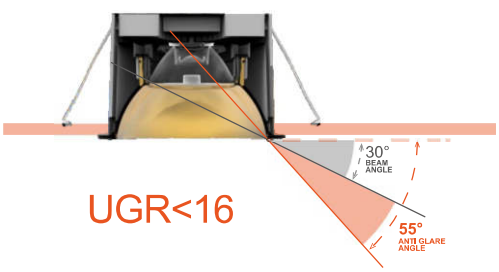

Shower

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP 54

NOMINAL FLUX

3000K: 7W 574lm | 10W 820lm
4000K: 7W 631lm | 10W 902lm

PRODUCT DESCRIPTION

IP54-rated recessed spot light, perfect for wet areas. Designed for maximum light output, it features an anti-glare gun black reflector that minimizes visual discomfort while delivering brilliant illumination. Ideal for bathrooms and outdoor spaces, this fixture combines durability and style for any environment.

PHOTO



DIMENSIONS

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 Fixed


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF101107	7W	□3000K□4000K	□90□95	□20°□40°	□White □Black	□ On-Off□0-10□DALI□ZIGBEE	□ 54
RF101210	10W	□3000K□4000K	□90□95	□20°□40°	□White □Black	□ On-Off□0-10□DALI□ZIGBEE	□ 54




RF101107-7W-20°

H(m)	E(lx)	D(cm)
1	1684	28
2	448	65
3	196	91
4	118	132
5	83	166




RF101210-10W-20°

H(m)	E(lx)	D(cm)
1	3112	45
2	854	92
3	320	136
4	160	181
5	98	228



RF101107-7W-40°

H(m)	E(lx)	D(cm)
1	512	72
2	132	161
3	64	252
4	42	331
5	28	423



RF101210-10W-40°

H(m)	E(lx)	D(cm)
1	787	98
2	196	211
3	88	333
4	49	415
5	32	522

Pearl

TECHNICAL DATA

MOUNTING
Mounting location: Ceiling
Type: Recessed

ELECTRICAL
Voltage : 220V
Frequency : 50/60Hz

LIGHT
Adjustibility : Fixed
Unified glare rating(UGR) : <16

LAMP DESCRIPTION
Lamp type : COB
Colour rendering index (CRI) : Ra>90
MacAdam : <3
LED Llife : L80B20-50000 Hrs
Environment temperature: -20℃~40℃
Ingress protection: IP 20

7W 574lm | 10W 820lm


NOMINAL FLUX
3000K: 8W 656lm | 10W 820lm
4000K: 8W 984lm | 10W 902lm

PRODUCT DESCRIPTION

Elegant recessed spot light featuring a stunning natural pearl finish, available in 8W and 12W options. This unique finish adds a touch of sophistication to any space, seamlessly blending style and functionality. Perfect for contemporary interiors, it provides warm, inviting illumination while enhancing your decor with its luxurious appearance.

PHOTO





DIMENSIONS

Color Temperature

2700~6000K | 3000K | 4000K | 5000K


CONTROL PROTOCOL: ON/OFF
OTHER VERSIONS: DALI, 1-10V, TRIAC

Finish
Pearl White

UGR<16 Fixed


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF100908	8W	□3000K□4000K□5000K	□90□95	□20°□40°	□Pearl White	□On-Off□0-10□DALI□ZIGBEE	□20
RF101012	12W	□3000K□4000K□5000K	□90□95	□20°□40°	□Pearl White	□On-Off□0-10□DALI□ZIGBEE	□20




RF100908-8W-24°

H(m)	E(lx)	D(cm)
1	1557	38
2	389	76
3	173	115
4	97	153
5	62	192




RF100908-12W-24°

H(m)	E(lx)	D(cm)
1	2886	39
2	721	79
3	320	119
4	180	159
5	115	198



RF101012-8W-36°

H(m)	E(lx)	D(cm)
1	797	65
2	199	130
3	88	195
4	49	260
5	31	326



RF101012-12W-36°

H(m)	E(lx)	D(cm)
1	853	85
2	213	170
3	95	260
4	53	340
5	29	258

Cave

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz


LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP 20

PHOTO

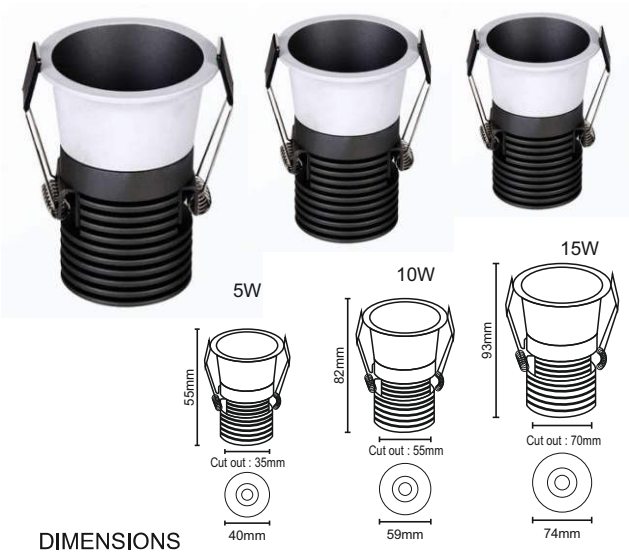

DIMENSIONS

NOMINAL FLUX

3000K: 5W 325lm | 10W 650lm | 15W 975lm
4000K: 5W 390lm | 10W 780lm | 15W 1080lm
5000K: 5W 410lm | 10W 820lm | 15W 1275lm

PRODUCT DESCRIPTION

Elegant recessed spot light featuring a stunning natural pearl finish, available in 8W and 12W options. This unique finish adds a touch of sophistication to any space, seamlessly blending style and functionality. Perfect for contemporary interiors, it provides warm, inviting illumination while enhancing your decor with its luxurious appearance.

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish


White | Matt black

UGR<19 | Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF102405	5W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White Gray	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20
RF102510	10W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White Gray	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20
RF102515	15W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White Gray	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20

24°




H(m)	E(lx)	ø(m)
H1	1395	0.41
H2	349	0.82
H3	155	1.24
H4	87	1.65
H5	44	2.10

24°




H(m)	E(lx)	ø(m)
H1	2093	0.4
H2	523	0.82
H3	233	1.23
H4	131	1.64
H5	74	2.15




H(m)	E(lx)	D(cm)
1	4912	41
2	1228	83
3	545	125
4	307	167
5	196	209

36°




H(m)	E(lx)	ø(m)
H1	723	0.6
H2	181	1.2
H3	80	1.8
H4	45	2.4
H5	28	3.1

36°



H(m)	E(lx)	ø(m)
H1	1116	0.65
H2	279	1.3
H3	124	1.96
H4	70	2.6
H5	40	3.2



H(m)	E(lx)	D(cm)
1	2695	65
2	673	131
3	299	197
4	168	262
5	107	328

Crown

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP 20 / IP44

NOMINAL FLUX


3000K: 8W 624lm 12W 936lm
4000K: 8W 694lm 12W 1050lm
5000K: 8W 798lm 12W 1180lm

PRODUCT DESCRIPTION

Illuminate your space with this recessed spotlight featuring a unique milled baffle design. Crafted for both style and functionality, it reduces glare while enhancing the aesthetic of any room. Ideal for modern interiors, this spotlight provides focused, fixed lighting, making it perfect for highlighting artwork or creating ambient settings.

PHOTO





DIMENSIONS

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee

Finish

Matt white | Matt black


UGR<19 Fixed

Honeycomb Louver
Material: Aluminium

Remark: Honeycomb Louver will reduce 10%-20% of the light output.


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105908	8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24°☐ 50°	☐ Matt Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20
RF105912	12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 50°	☐ Matt Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20




RF105908-8W-24°

H(m)	E(lx)	D(cm)
1	2230	41
2	558	90
3	248	130
4	139	170
5	89	210




RF105908-8W-36°

H(m)	E(lx)	D(cm)
1	1540	60
2	392	130
3	198	190
4	96	260
5	67	320




RF105908-8W-50°

H(m)	E(lx)	D(cm)
1	1186	88
2	297	176
3	132	265
4	74	353
5	47	441




RF105908-12W-24°

H(m)	E(lx)	D(cm)
1	1935	40
2	485	90
3	215	130
4	125	170
5	80	210



RF105912-12W-36°

H(m)	E(lx)	D(cm)
1	1417	60
2	354	130
3	157	190
4	89	260
5	57	320



RF105912-12W-50°

H(m)	E(lx)	D(cm)
1	1193	92
2	298	190
3	133	265
4	75	345
5	48	439

Maxglo

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 25W 2050lm | 35W 2870lm
4000K: 25W 2250lm | 35W 3150lm
5000K: 25W 2375lm | 35W 3325lm


PRODUCT DESCRIPTION

High lumen recessed fixed spotlight, designed specifically for showrooms. Offering exceptional brightness and clarity, it highlights products with impressive detail, enhancing the shopping experience. Its sleek, unobtrusive design integrates seamlessly into ceilings, providing powerful yet elegant illumination that draws attention to your merchandise effortlessly.

PHOTO



DIMENSIONS

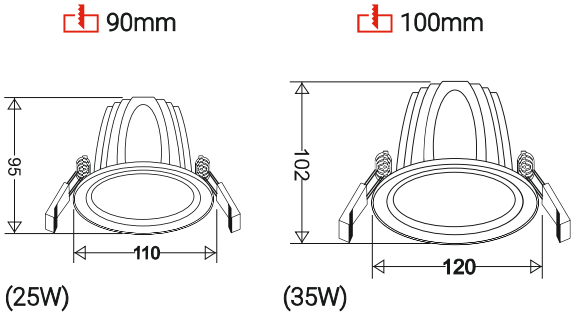

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 | Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107925	☐ 25W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107935	☐ 35W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

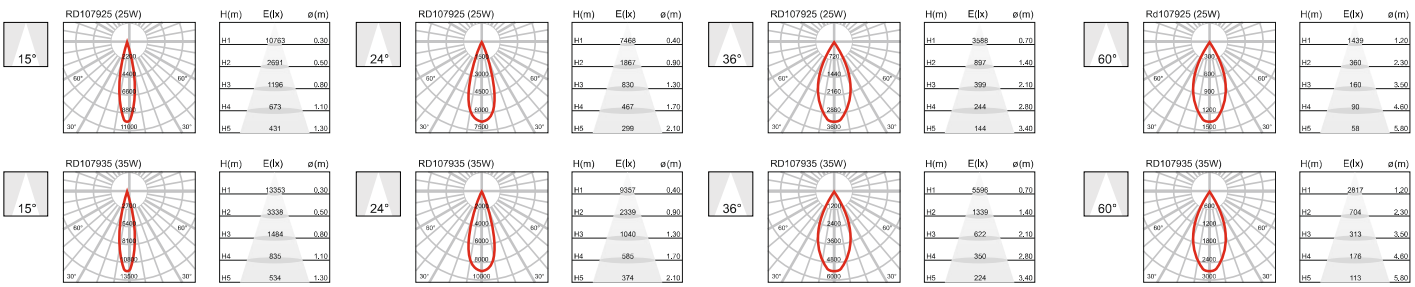

Cozy

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	Ip44

NOMINAL FLUX


3000K: 5W 375lm | 8W 600lm | 15W 1125lm
4000K: 5W 425lm | 8W 680lm | 15W 1275lm
5000K: 5W 475lm | 8W 760lm | 15W 1425lm

PRODUCT DESCRIPTION


Elegant recessed spot light featuring a stunning natural pearl finish, available in 8W and 12W options. This unique finish adds a touch of sophistication to any space, seamlessly blending style and functionality. Perfect for contemporary interiors, it provides warm, inviting illumination while enhancing your decor with its luxurious appearance.

PHOTO














DIMENSIONS

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

RECOMMEND:

ON/OFF


Finish

White

UGR<19 Fixed


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF102205	5W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 80°	☐ White	☐ On-Off	☐ 44
RF102308	8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 80°	☐ White	☐ On-Off	☐ 44
RF102415	15W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 80°	☐ White	☐ On-Off	☐ 44




RF102205-5W-80°

H(m)	E(lx)	D(cm)
1	128	215
2	27	421
3	12	623
4	7	894
5	4	1054



RF102308-8W-80°

H(m)	E(lx)	D(cm)
1	141	229
2	35	458
3	15	687
4	9	916
5	6	1145



RF102415-15W-80°

H(m)	E(lx)	D(cm)
1	241	226
2	60	452
3	26	678
4	15	905
5	9	1131

Comfort

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20


NOMINAL FLUX

3000K: 12W 984lm | 18W 1476lm | 24W 1968lm
4000K: 12W 1068lm | 18W 1602lm | 24W 2136lm
5000K: 12W 1320lm | 18W 1980lm | 24W 2640lm


PRODUCT DESCRIPTION

compact design recessed downlight featuring a prismatic diffuser that enhances light distribution, ensuring maximum brightness and efficiency. With an impressive output of lumens per watt, this downlight is ideal for any space needing optimal illumination. Perfect for modern interiors, it combines style and performance seamlessly. Illuminate your environment effortlessly!

PHOTO

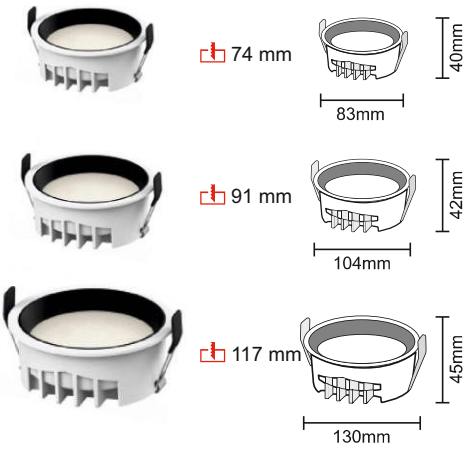


DIMENSIONS

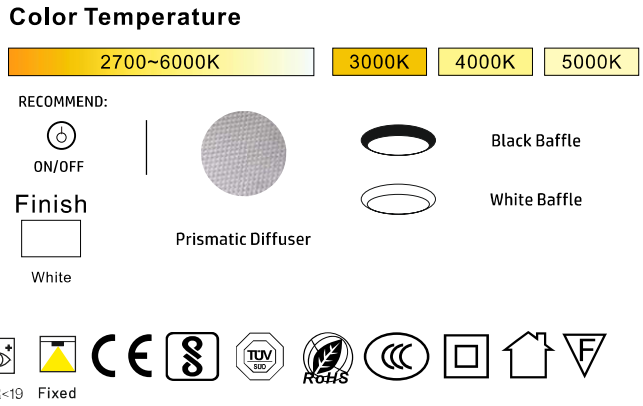


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF104612	12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 110°	☐ White ☐ Black	☐ On-Off	☐ 20
RF104718	18W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 110°	☐ White ☐ Black	☐ On-Off	☐ 20
RF104824	24W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 110°	☐ White ☐ Black	☐ On-Off	☐ 20




RF104612-12W-110°

H(m)	E(lx)	D(cm)
1	241	226
2	60	452
3	26	678
4	15	905
5	9	1131



RF104718-18W-110°

H(m)	E(lx)	D(cm)
1	377	230
2	94	461
3	41	692
4	23	923
5	15	1154



RF104824-24W-110°

H(m)	E(lx)	D(cm)
1	406	245
2	101	491
3	45	736
4	25	982
5	18	1227

INDOOR

Recessed **Adjustable**

Nano

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 3W 216lm
4000K: 3W 242lm
5000K: 3W 270lm


PRODUCT DESCRIPTION

perfect blend of compact design and powerful performance. This tiny fixture offers precise light directionality, making it ideal for accentuating artwork or architectural features. Its sleek aesthetics fit seamlessly into any environment, proving that great things come in small packages for modern lighting solutions.

PHOTO



DIMENSIONS

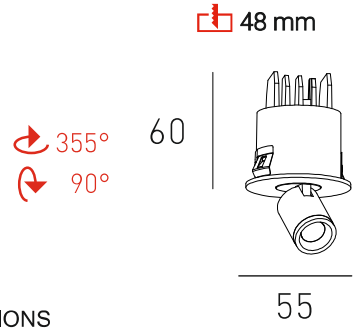

DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White

Color Temperature


3000K | 4000K | 5000K


UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD106103	☐ 3W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White	☐ On-Off	20


15°







24°





36°





Cabi

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	50 mm
Height :	29 mm
Cut out :	45 mm

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 2W 142lm
4000K: 2W 150lm
5000K: 2W 168lm


PRODUCT DESCRIPTION

CNC-Made High Compact Recessed Spotlight, engineered for precision and performance. This stylish fixture features customizable beam angles, allowing you to tailor the lighting to your needs. Its sleek design fits seamlessly into any ceiling, providing powerful illumination that enhances your space while maintaining a clean, modern aesthetic.

PHOTO



DIMENSIONS



DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White

Color Temperature


3000K | 4000K | 5000K


UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD102203	☐ 2W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20


12°





24°





Soft

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 3W 160lm
4000K: 3W 179lm
5000K: 3W 200lm

PRODUCT DESCRIPTION


Unique Design Adjustable Spotlight with a 6mm light source, engineered for exceptional anti-glare performance. This innovative fixture allows precise light direction while minimizing discomfort from bright spots. Its sleek design enhances any environment

PHOTO



DIMENSIONS

57 mm



φ62

DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White

Color Temperature


3000K | 4000K | 5000K


UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD102303	☐ 3W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off	20


24°





36°





Cat's Eye

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20


NOMINAL FLUX

3000K: 3W 160lm
4000K: 3W 179lm
5000K: 3W 200lm


PRODUCT DESCRIPTION

Miniature Tiltable Spotlight. Compact yet powerful, this stylish fixture allows for precise beam adjustment, making it perfect for accentuating small spaces or artworks. Its modern design enhances any decor while providing versatile illumination, proving that great things come in small packages. Perfect for creative applications!

PHOTO



DIMENSIONS



DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White

Color Temperature


3000K | 4000K | 5000K

UGR<19 Adjustable


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107203	☐ 3W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off	20


15°



24°



36°



Mig

TECHNICAL DATA

MOUNTING
Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL
Voltage :	220V
Frequency :	50/60Hz

DIMENSION
Dia :	52 mm
Height :	60 mm
Cut out :	45 mm

LIGHT
Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION
Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX
3000K: 5W 340lm | 7W 476lm
4000K: 5W 380lm | 7W 533lm
5000K: 5W 435lm | 7W 612lm


PRODUCT DESCRIPTION

CNC-Made High Compact Recessed Spotlight, engineered for precision and performance. This stylish fixture features customizable beam angles, allowing you to tailor the lighting to your needs. Its sleek design fits seamlessly into any ceiling, providing powerful illumination that enhances your space while maintaining a clean, modern aesthetic.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee


Finish


Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107505	☐ 5W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107507	☐ 7W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

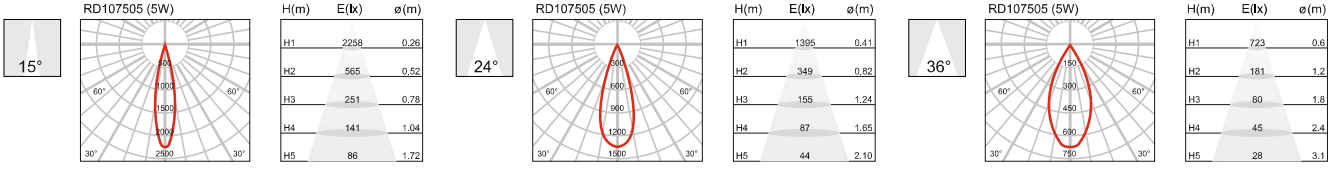

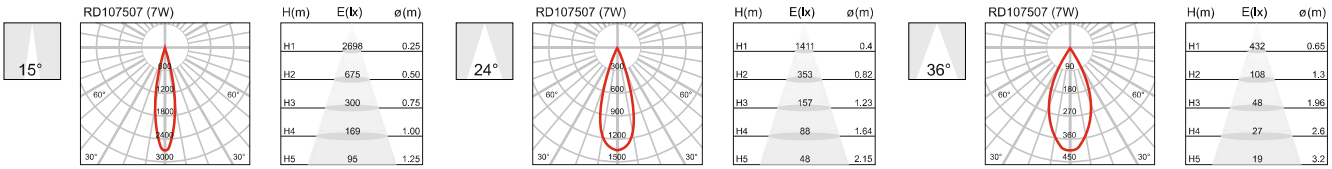

Lumo D

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

DIMENSION

Dia :	60 mm
Height :	68 mm
Cut out :	50 mm

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 5W 325lm | 8W 496lm
4000K: 5W 348lm | 8W 516lm
5000K: 5W 362lm | 8W 528lm


PRODUCT DESCRIPTION

Innovative heat sink design optimizes space while delivering high output performance in both 5-watt and 8-watt options. Engineered for efficient heat dissipation, it ensures longevity and consistent brightness. Ideal for compact fixtures, this design enhances both residential and commercial lighting solutions—combining power with elegance in any setting.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SP6157D	☐5W☐8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

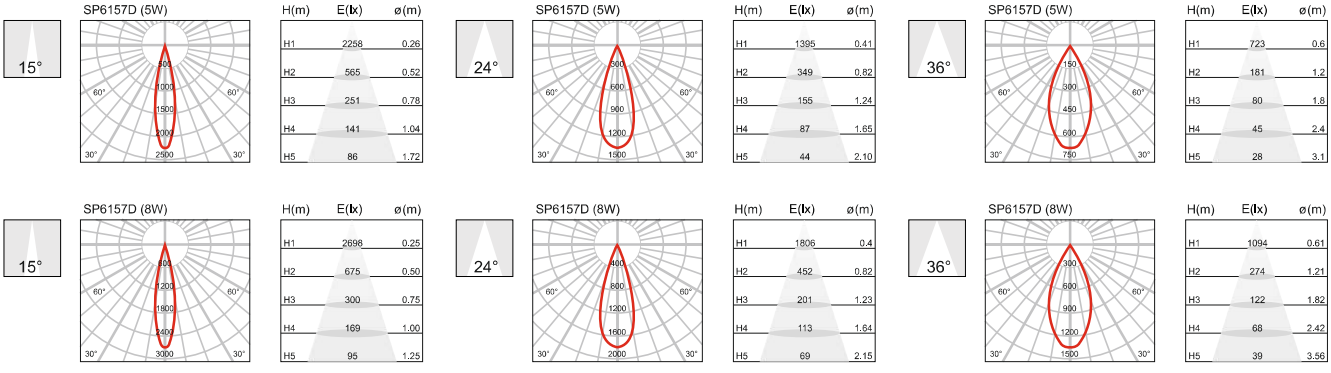

Adora

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 6W 450lm
4000K: 6W 517lm
5000K: 6W 595lm


PRODUCT DESCRIPTION

Unique Design Adjustable Spotlight with a 20mm light source, engineered for exceptional anti-glare performance. This innovative fixture allows precise light direction while minimizing discomfort from bright spots. Its sleek design enhances any environment

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee

Finish


Matt white | Matt black


UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD102406	☐ 6W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20


24°





36°





Stylo Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 6W 468lm | 8W 624lm
4000K: 6W 504lm | 8W 672lm
5000K: 6W 540lm | 8W 720lm

PRODUCT DESCRIPTION

Stylish and elegant spotlight, featuring optional beam angles for customized lighting. Perfect for highlighting decor or creating mood, this versatile fixture combines modern aesthetics with functionality. Its sleek design seamlessly integrates into any space, making it an ideal choice for enhancing your home's ambiance.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD106306	☐ 6W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106308	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

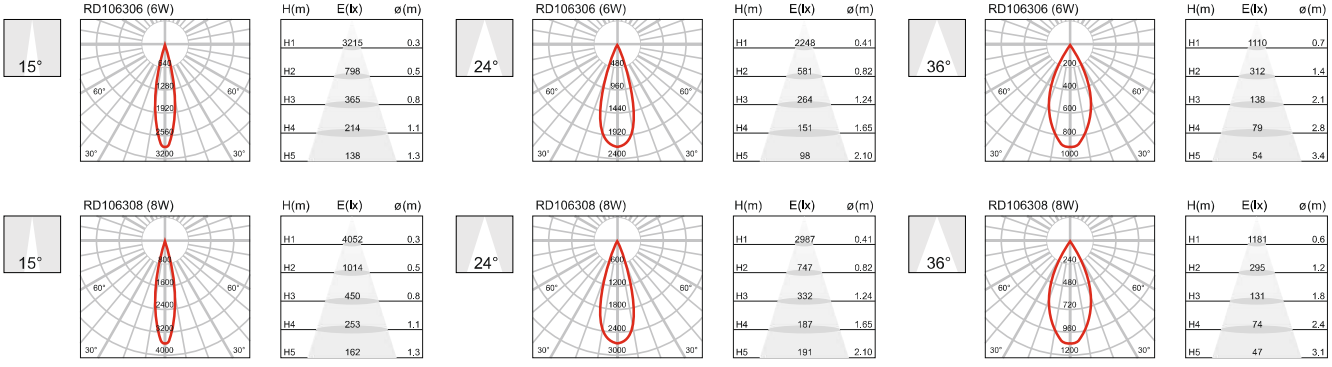

Spill

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm


PRODUCT DESCRIPTION

Spotlight with an Anti-Glare Baffle and Spill Cylinder Casing, designed for effortless maintenance. This fixture minimizes unwanted glare while providing focused illumination, making it ideal for various settings. The durable casing allows for easy access, ensuring quick adjustments and light source replacements, combining practicality and performance for any space.

PHOTO



DIMENSIONS




white+black


white+silver

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish

Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD102608	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 26° ☐ 37°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD102712	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 26° ☐ 37°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

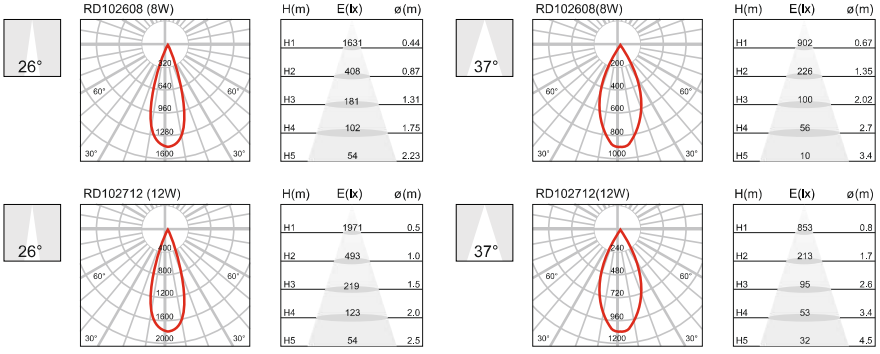

Winkey

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm


PRODUCT DESCRIPTION

Recessed Adjustable Spotlight, designed for versatility and style. This sleek fixture allows you to direct light precisely where needed, creating a focused illumination effect. Perfect for highlighting artwork or architectural features, it seamlessly blends into any ceiling, enhancing your space with modern sophistication and exceptional functionality.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish


Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD105908	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106012	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 15° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

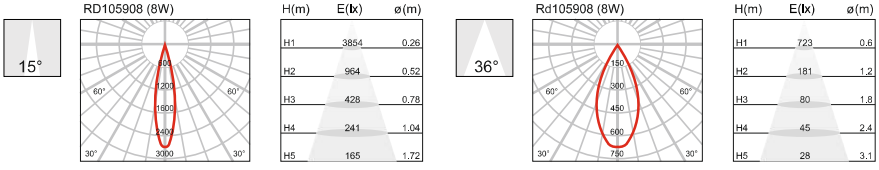

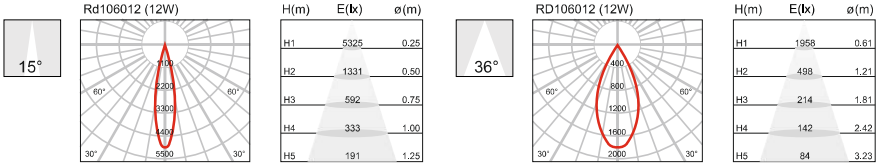

Crown D

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP 20 / IP44

NOMINAL FLUX

3000K: 8W 624lm 12W 936lm
4000K: 8W 694lm 12W 1050lm
5000K: 8W 798lm 12W 1180lm

PRODUCT DESCRIPTION

Illuminate your space with this recessed spotlight featuring a unique milled baffle design. Crafted for both style and functionality, it reduces glare while enhancing the aesthetic of any room. Ideal for modern interiors, this spotlight provides focused, adjustable lighting, making it perfect for highlighting artwork or creating ambient settings.

PHOTO



DIMENSIONS

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish

Matt white | Matt black


UGR<19 Adjustable

Honeycomb Louver
Material: Aluminium

Remark: Honeycomb Louver will reduce 10%-20% of the light output.


ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RF105908	8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24°☐ 50°	☐ Matt Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20
RF105912	12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 50°	☐ Matt Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	☐ 20




RF105908-8W-24°

H(m)	E(lx)	D(cm)
1	2230	41
2	558	90
3	248	130
4	139	170
5	89	210




RF105908-8W-36°

H(m)	E(lx)	D(cm)
1	1540	60
2	392	130
3	198	190
4	96	260
5	67	320




RF105908-8W-50°

H(m)	E(lx)	D(cm)
1	1186	88
2	297	176
3	132	265
4	74	353
5	47	441




RF105908-12W-24°

H(m)	E(lx)	D(cm)
1	1935	40
2	485	90
3	215	130
4	125	170
5	80	210



RF105912-12W-36°


H(m)	E(lx)	D(cm)
1	1417	60
2	354	130
3	157	190
4	89	260
5	57	320



RF105912-12W-50°

H(m)	E(lx)	D(cm)
1	1193	92
2	298	190
3	133	265
4	75	345
5	48	439

KENDO-Pro

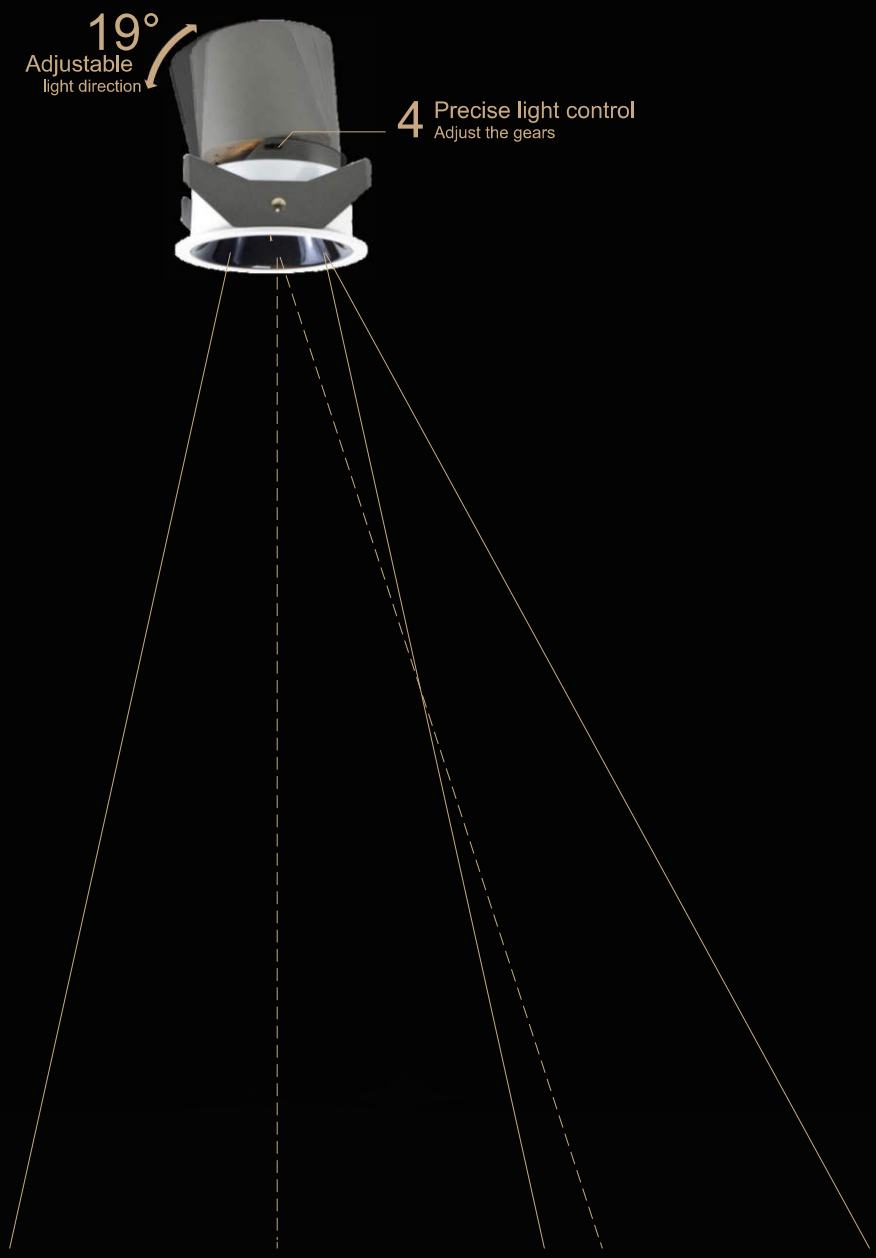
19°
Adjustable
light direction
4 Precise light control
Adjust the gears

INDOOR

Recessed **Fixed**

Kendo RD

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm


PRODUCT DESCRIPTION

Internal Tiltable spotlight featuring a gun metal dark reflector. This stylish fixture offers adjustable angles for targeted lighting, perfect for accentuating art or creating warm ambiance. Its sleek design and sophisticated finish add a modern touch to any interior, blending elegance with versatile functionality.

PHOTO



DIMENSIONS

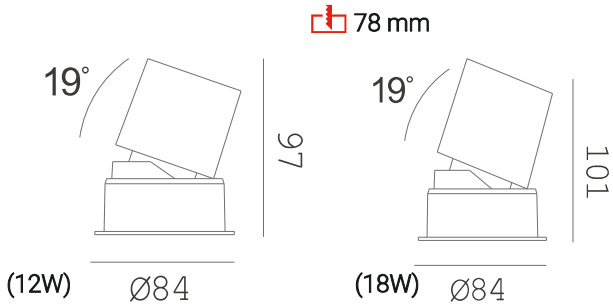

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF


OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish: Matt white | Matt black


UGR<19 | Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD106808	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106812	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106818	☐ 18W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

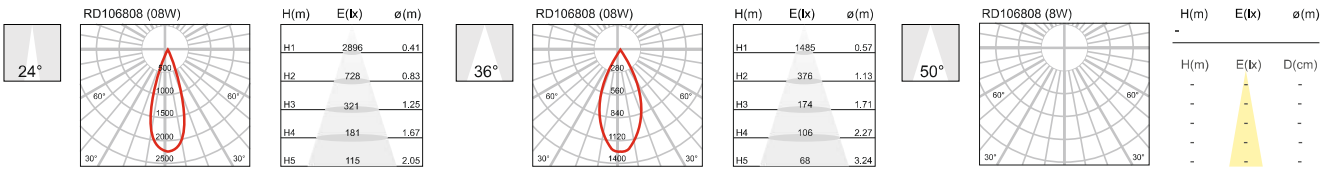

PHOTOMETRIC ON REQUEST

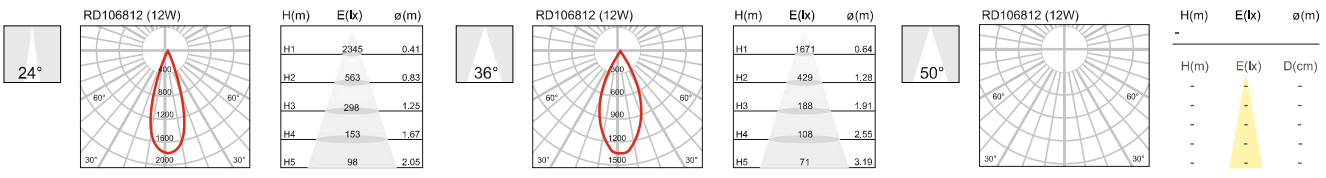

PHOTOMETRIC ON REQUEST

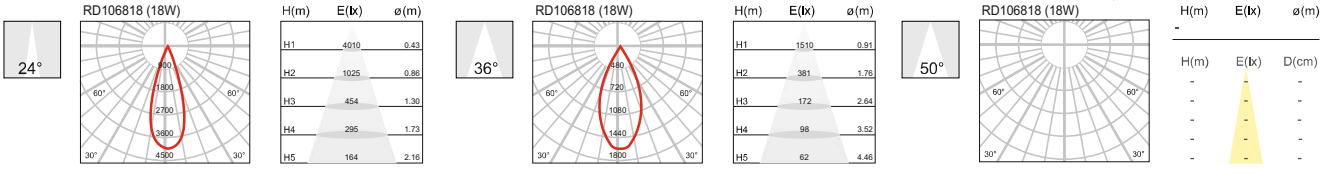

PHOTOMETRIC ON REQUEST

Kendo RD Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm


PRODUCT DESCRIPTION

Discover the elegance of our trimless internal tiltable spotlight with a dark reflector. Effortlessly adjustable, it provides versatile illumination for accent lighting, enhancing your decor without distraction.

PHOTO



DIMENSIONS

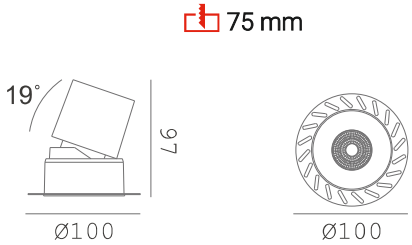

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish

Matt white | Matt black


UGR<19 | Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107508	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107512	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°


RD107508 (08W)



H(m)	E(lx)	ø(m)
H1	2896	0.41
H2	728	0.83
H3	321	1.25
H4	181	1.67
H5	115	2.05

36°


RD107508 (08W)



H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	376	1.13
H3	174	1.71
H4	106	2.27
H5	68	3.24

50°

RD107508 (08W)




H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

24°


RD107512 (12W)



H(m)	E(lx)	ø(m)
H1	2345	0.41
H2	563	0.83
H3	298	1.25
H4	153	1.67
H5	98	2.05

36°


RD107512 (12W)



H(m)	E(lx)	ø(m)
H1	1671	0.64
H2	429	1.28
H3	188	1.91
H4	108	2.55
H5	71	3.19

50°

RD107512 (12W)



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Kendo RD Wash

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm


PRODUCT DESCRIPTION

Recessed wall washer spotlight. Designed for even illumination, this fixture creates a soft, inviting glow that highlights architectural features and enhances room ambiance. Its sleek, unobtrusive design blends seamlessly into any decor, making it the perfect choice for creating a warm and welcoming atmosphere.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee


Finish: Matt white, Matt black

UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107708	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ Asymmetric	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107712	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ Asymmetric	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

RD107708 (08W)



H(m)	E(lx)	ø(m)
H1	498	0.3
H2	105	0.5
H3	55	0.8
H4	31	1.1
H5	20	1.3

RD107712 (12W)



H(m)	E(lx)	ø(m)
H1	747	0.35
H2	187	0.55
H3	83	0.85
H4	47	1.15
H5	30	1.35

Kendo SQ

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19


LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

PHOTO



DIMENSIONS

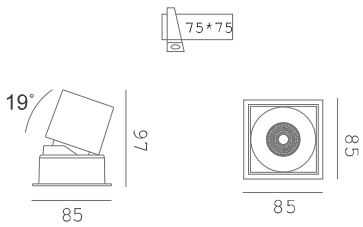

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm

PRODUCT DESCRIPTION

Internal Tiltable spotlight featuring a gun metal dark reflector. This stylish fixture offers adjustable angles for targeted lighting, perfect for accentuating art or creating warm ambiance. Its sleek design and sophisticated finish add a modern touch to any interior, blending elegance with versatile functionality.

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL

ON/OFF | DALI | 1-10V | TRIAC | zigbee

OTHER VERSIONS:

Finish


Matt white | Matt black

UGR<19 | Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD106908	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106912	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°




H(m)	E(lx)	ø(m)
H1	2896	0.41
H2	728	0.83
H3	321	1.25
H4	181	1.67
H5	115	2.05

36°



H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	376	1.13
H3	174	1.71
H4	106	2.27
H5	68	3.24

50°




H(m)	E(lx)	ø(m)
-		

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-


PHOTOMETRIC ON REQUEST

24°




H(m)	E(lx)	ø(m)
H1	2345	0.41
H2	563	0.83
H3	298	1.25
H4	153	1.67
H5	98	2.05

36°



H(m)	E(lx)	ø(m)
H1	1671	0.64
H2	429	1.28
H3	188	1.91
H4	108	2.55
H5	71	3.19

50°



H(m)	E(lx)	ø(m)
-		

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Kendo SQ Trimless

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19


LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

PHOTO



DIMENSIONS

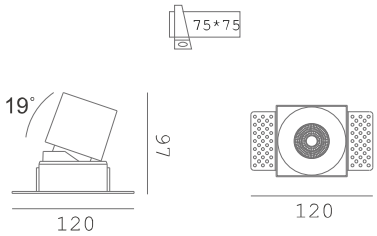

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm

PRODUCT DESCRIPTION

Discover the elegance of our trimless internal tiltable spotlight with a dark reflector. Effortlessly adjustable, it provides versatile illumination for accent lighting, enhancing your decor without distraction.

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish

Matt white | Matt black


UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107608	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107612	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°


RD107608 (8W)



H(m)	E(lx)	ø(m)
H1	2896	0.41
H2	728	0.83
H3	321	1.25
H4	181	1.67
H5	115	2.05

36°


RD107608 (8W)



H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	376	1.13
H3	174	1.71
H4	106	2.27
H5	68	3.24

50°

RD106808 (8W)




H(m)	E(lx)	ø(m)
-		

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

24°


RD107612 (12W)



H(m)	E(lx)	ø(m)
H1	2345	0.41
H2	563	0.83
H3	298	1.25
H4	153	1.67
H5	98	2.05

36°


RD107612 (12W)



H(m)	E(lx)	ø(m)
H1	1671	0.64
H2	429	1.28
H3	188	1.91
H4	108	2.55
H5	71	3.19

50°

RD107612 (12W)



H(m)	E(lx)	ø(m)
-		

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Kendo SQ Wash

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 520lm | 12W 780lm
4000K: 8W 598lm | 12W 890lm
5000K: 8W 687lm | 12W 998lm

PRODUCT DESCRIPTION


Recessed wall washer spotlight. Designed for even illumination, this fixture creates a soft, inviting glow that highlights architectural features and enhances room ambiance. Its sleek, unobtrusive design blends seamlessly into any decor, making it the perfect choice for creating a warm and welcoming atmosphere.

PHOTO



DIMENSIONS

75 x 75 mm



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish


Matt white | Matt black

UGR<19 | Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107808	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ Asymmetric	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107812	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ Asymmetric	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

RD108708 (08W)



H(m)	E(lx)	ø(m)
H1	498	0.3
H2	105	0.5
H3	55	0.8
H4	31	1.1
H5	20	1.3

RD107812 (12W)



H(m)	E(lx)	ø(m)
H1	747	0.35
H2	187	0.55
H3	83	0.85
H4	47	1.15
H5	30	1.35

Kendo Duo

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20 ℃~40 ℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W x 2 - 520lm x 2 | 12W x 2 - 780lm x 2
4000K: 8W x 2 - 598lm x 2 | 12W x 2 - 890lm x 2
5000K: 8W x 2 - 687lm x 2 | 12W x 2 - 998lm x 2

PRODUCT DESCRIPTION


Internal Dual Adjustable Tiltable Spotlight. Featuring two independently adjustable heads, this fixture allows for versatile lighting options, perfect for accentuating artwork or creating dynamic lighting effects. Its modern design complements any decor, providing both style and functionality to elevate your interior ambiance effortlessly.

PHOTO



DIMENSIONS

150 x 75 mm

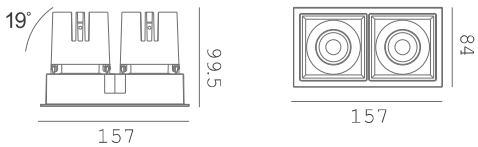

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish


Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107508	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107512	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 50°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°




H(m)	E(lx)	ø(m)
H1	2896	0.41
H2	728	0.83
H3	321	1.25
H4	181	1.67
H5	115	2.05

36°



H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	376	1.13
H3	174	1.71
H4	106	2.27
H5	68	3.24

50°




H(m)	E(lx)	ø(m)
-		

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-


PHOTOMETRIC ON REQUEST

24°




H(m)	E(lx)	ø(m)
H1	2345	0.41
H2	563	0.83
H3	298	1.25
H4	153	1.67
H5	98	2.05

36°



H(m)	E(lx)	ø(m)
H1	1671	0.64
H2	429	1.28
H3	188	1.91
H4	108	2.55
H5	71	3.19

50°



H(m)	E(lx)	ø(m)
-		

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Gimble Uno

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W 640lm | 12W 984lm
4000K: 8W 680lm | 12W 1032lm
5000K: 8W 736lm | 12W 1104lm


PRODUCT DESCRIPTION

Stylish and elegant spotlight, featuring optional beam angles for customized lighting. Perfect for highlighting decor or creating mood, this versatile fixture combines modern aesthetics with functionality. Its sleek design seamlessly integrates into any space, making it an ideal choice for enhancing your home's ambiance.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish


Matt white | Matt black

UGR<19 | Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD106508	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106512	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

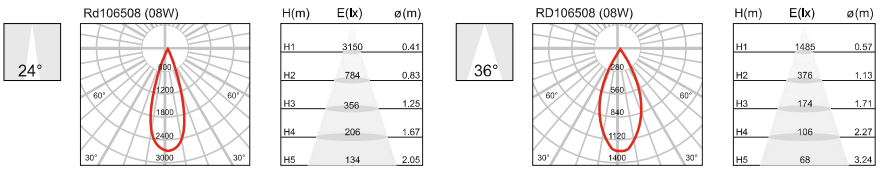

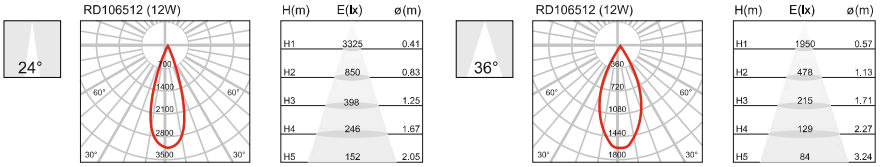

Gimble Duo

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W x 2 - 640lm x 2 | 12W x 2 - 984lm x 2
4000K: 8W x 2 - 680lm x 2 | 12W x 2 - 1032lm x 2
5000K: 8W x 2 - 736lm x 2 | 12W x 2 - 1104lm x 2


PRODUCT DESCRIPTION

gimbal and swivel design adjustable spotlight. This innovative fixture allows for precise directionality, enabling you to highlight specific areas or objects with ease. Its sleek profile combines style and functionality, making it perfect for modern spaces while providing optimal illumination wherever you need it.

PHOTO



DIMENSIONS

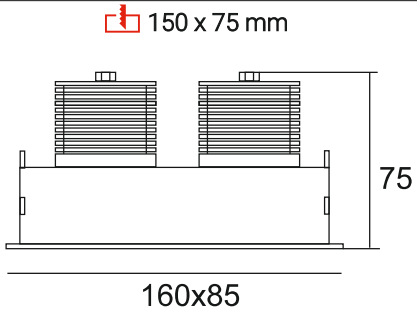

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee


Finish


Matt white | Matt black

UGR<19 | Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD106508	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD106512	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

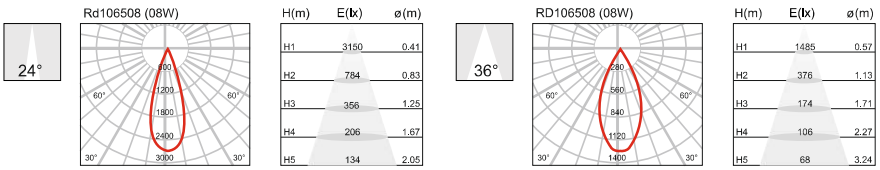

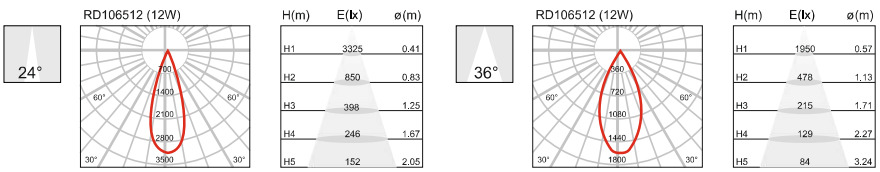

Maxglo-D

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 25W 2050lm | 35W 2870lm
4000K: 25W 2250lm | 35W 3150lm
5000K: 25W 2375lm | 35W 3325lm


PRODUCT DESCRIPTION

High lumen recessed directional spotlight, designed specifically for showrooms. Offering exceptional brightness and clarity, it highlights products with impressive detail, enhancing the shopping experience. Its sleek, unobtrusive design integrates seamlessly into ceilings, providing powerful yet elegant illumination that draws attention to your merchandise effortlessly.

PHOTO



DIMENSIONS

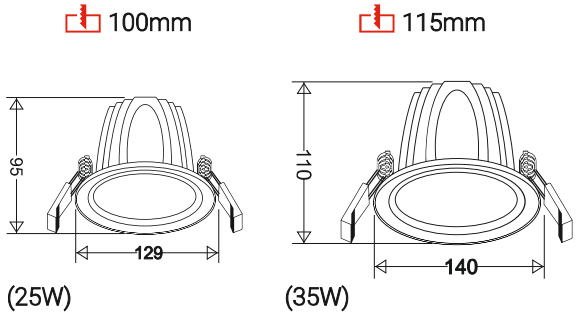

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee


Finish

Matt white | Matt black

UGR<19 Adjustable

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
RD107925	☐ 25W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
RD107935	☐ 35W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

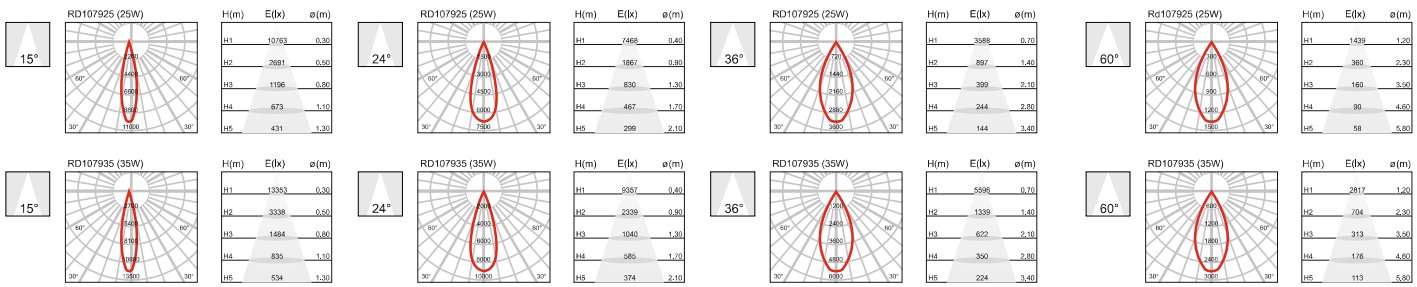

INDOOR

Recessed **Surface**

Versa

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Recessed

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 3W 160lm
4000K: 3W 179lm
5000K: 3W 200lm


PRODUCT DESCRIPTION

Miniature Tiltable Spotlight. Compact yet powerful, this stylish fixture allows for precise beam adjustment, making it perfect for accentuating small spaces or artworks. Its modern design enhances any decor while providing versatile illumination, proving that great things come in small packages. Perfect for creative applications!

PHOTO



DIMENSIONS



DIMENSIONS

RECOMMEND:

ON/OFF

Color Temperature

3000K | 4000K | 5000K

Finish


White

UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM107403	☐ 3W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White	☐ On-Off	20

15°




H(m)	E(lx)	ø(m)
H1	780	0.30
H2	215	0.50
H3	113	0.80
H4	57	1.10
H5	31	1.30

24°



H(m)	E(lx)	ø(m)
H1	612	0.45
H2	163	0.71
H3	78	1.20
H4	58	1.45
H5	39	1.99

36°



H(m)	E(lx)	ø(m)
H1	278	0.6
H2	83	1.3
H3	49	1.9
H4	27	2.6
H5	19	3.2

PATON
SURFACE



PATON series is very versatile with its compact and beautiful appearance. It is suitable for both general lighting and accent lighting. The design of the series and the wide selection of optical angles allow designers to create a distinctive atmosphere and feel.



Paton RD

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W - 640lm
4000K: 8W - 680l
5000K: 8W - 736lm


PRODUCT DESCRIPTION

gimbal and swivel design adjustable spotlight. This innovative fixture allows for precise directionality, enabling you to highlight specific areas or objects with ease. Its sleek profile combines style and functionality, making it perfect for modern spaces while providing optimal illumination wherever you need it.

PHOTO



DIMENSIONS



SM105312RD

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee

Finish: Matt white, Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.

UGR<19 Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM107508	☐ 8W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 60°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°




H(m)	E(lx)	ø(m)
H1	3150	0.41
H2	784	0.83
H3	356	1.25
H4	206	1.67
H5	134	2.05

36°



H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	376	1.13
H3	174	1.71
H4	106	2.27
H5	68	3.24



-

H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

Paton SQ

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W - 640lm | 12W - 984lm
4000K: 8W - 680lm | 12W - 1032lm
5000K: 8W - 736lm | 12W - 1104lm


PRODUCT DESCRIPTION

gimbal and swivel design adjustable spotlight. This innovative fixture allows for precise directionality, enabling you to highlight specific areas or objects with ease. Its sleek profile combines style and functionality, making it perfect for modern spaces while providing optimal illumination wherever you need it.

PHOTO



DIMENSIONS



SM105312SQ

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee

Finish: Matt white, Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.


UGR<19 Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM105308	☐ 08W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 60°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
SM105312	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 60°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20


24°







36°












PHOTOMETRIC ON REQUEST


24°







36°









PHOTOMETRIC ON REQUEST

CLARION

SURFACE

The CLARION series are as bright and energetic as the eyes,
and the brightly divided lights bring extraordinary visual impact.
Light body can be vertical 90 ° swing and horizontal 355 ° rotation,

IP20 | DC | | | | RoHS

Clarion

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 12W - 985lm
4000K: 12W - 1132lm
5000K: 12W - 1245lm


PRODUCT DESCRIPTION

The CLARION series are as bright and energetic as the eyes, and the brightly divided lights bring extraordinary visual impact. Light body can be vertical 90 ° swing and horizontal 355 ° rotation

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee

Finish: Matt white, Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.

UGR<19 Adjustable

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM107912	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 60°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°



H(m)	E(lx)	ø(m)
H1	3150	40
H2	788	90
H3	350	130
H4	198	170
H5	126	210

36°



H(m)	E(lx)	ø(m)
H1	1928	60
H2	482	130
H3	215	190
H4	121	260
H5	77	320

Oscar

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 7W - 640lm | 12W - 984lm
4000K: 7W - 680lm | 12W - 1032lm
5000K: 7W - 736lm | 12W - 1104lm


PRODUCT DESCRIPTION

Cylindrical Surface Downlight, designed for sleek simplicity and focused lighting. Its modern, minimalist design seamlessly integrates into any decor, offering powerful illumination with energy efficiency. Perfect for highlighting artwork or enhancing ambiance, this downlight provides versatility and style to elevate your interior environments.

PHOTO



DIMENSIONS

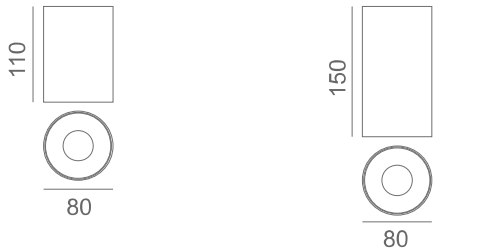

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish: Matt white | Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.


UGR<19 | Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM107807	☐ 07W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 60°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
SM107812	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36° ☐ 60°	☐ White	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20


24°







36°







24°





36°





Zen

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W - 640lm | 12W - 984lm
4000K: 8W - 680lm | 12W - 1032lm
5000K: 8W - 736lm | 12W - 1104lm


PRODUCT DESCRIPTION

Square Downlight featuring a baffle reflector. Designed for stylish efficiency, this sleek fixture minimizes glare while providing even light distribution. Ideal for residential and commercial settings, it offers a modern aesthetic and energy-efficient performance, making it perfect for ceiling installations in any room.

PHOTO



DIMENSIONS

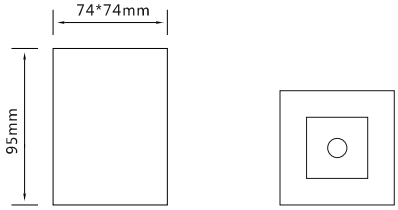

Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI | 1-10V | TRIAC | zigbee

Finish: Matt white | Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.

UGR<19 | Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM108008	☐ 08W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
SM108012	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°




H(m)	E(lx)	ø(m)
H1	3100	0.41
H2	734	0.83
H3	316	1.25
H4	192	1.67
H5	112	2.05

36°




H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	346	1.13
H3	134	1.71
H4	94	2.27
H5	51	3.24

24°



H(m)	E(lx)	ø(m)
H1	3125	0.41
H2	779	0.83
H3	342	1.25
H4	198	1.67
H5	118	2.05

36°



H(m)	E(lx)	ø(m)
H1	1445	0.57
H2	356	1.13
H3	168	1.71
H4	94	2.27
H5	59	3.24

AXIS
SURFACE



Surface Mount Adjustable Spotlight, equipped with an anti-glare honeycomb. This versatile fixture allows for customizable direction, ensuring focused illumination without distracting glare. Its sleek design complements any interior decor, making it perfect for highlighting artwork, accentuating features, or enhancing ambiance in residential and commercial spaces.

Axis

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Adjustable
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	COB
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 7W - 504lm | 10W - 720lm
4000K: 7W - 580lm | 10W - 806lm
5000K: 7W - 667lm | 10W - 895lm


PRODUCT DESCRIPTION

Surface Mount Adjustable Spotlight, equipped with an anti-glare honeycomb. This versatile fixture allows for customizable direction, ensuring focused illumination without distracting glare. Its sleek design complements any interior decor, making it perfect for highlighting artwork, accentuating features, or enhancing ambiance in residential and commercial spaces.

PHOTO



DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL: ON/OFF

OTHER VERSIONS: DALI, 1-10V, TRIAC, zigbee


Finish: Matt white, Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.

UGR<19 Fixed

ORDER TEMPLATE

Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM108407	☐ 08W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
SM108410	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

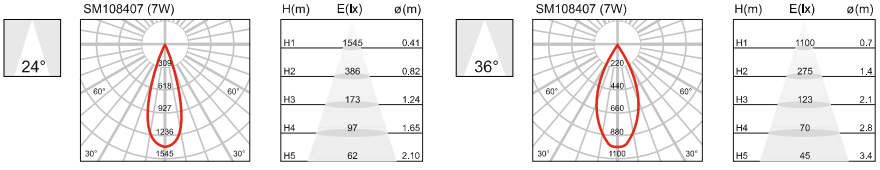

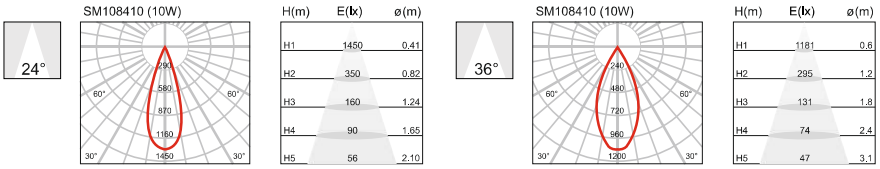

Barrel

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20


NOMINAL FLUX

3000K: 8W - 640lm | 12W - 984lm
4000K: 8W - 680lm | 12W - 1032lm
5000K: 8W - 736lm | 12W - 1104lm


PRODUCT DESCRIPTION

Square Downlight featuring a baffle reflector. Designed for stylish efficiency, this sleek fixture minimizes glare while providing even light distribution. Ideal for residential and commercial settings, it offers a modern aesthetic and energy-efficient performance, making it perfect for ceiling installations in any room.

PHOTO

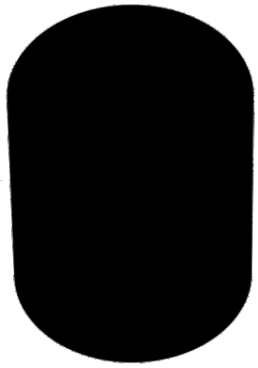

DIMENSIONS



Color Temperature

2700~6000K | 3000K | 4000K | 5000K

CONTROL PROTOCOL

ON/OFF

OTHER VERSIONS:

DALI | 1-10V | TRIAC | zigbee

Finish

Matt white | Matt black


Honeycomb Louver
Material: Aluminium
Remark: Honeycomb Louver will reduce 10%-20% of the light output.

UGR<19 | Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM104608	☐ 08W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20
SM104612	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90 ☐ 95	☐ 24° ☐ 36°	☐ White ☐ Black	☐ On-Off ☐ 0-10 ☐ DALI ☐ ZIGBEE	20

24°




H(m)	E(lx)	ø(m)
H1	3100	0.41
H2	734	0.83
H3	316	1.25
H4	192	1.67
H5	112	2.05

36°




H(m)	E(lx)	ø(m)
H1	1485	0.57
H2	346	1.13
H3	134	1.71
H4	94	2.27
H5	51	3.24

24°



H(m)	E(lx)	ø(m)
H1	3125	0.41
H2	779	0.83
H3	342	1.25
H4	198	1.67
H5	118	2.05

36°



H(m)	E(lx)	ø(m)
H1	1445	0.57
H2	356	1.13
H3	168	1.71
H4	94	2.27
H5	59	3.24

AURA
SURFACE



Surface Mount Diffused Downlight provides soft, even illumination, perfect for creating a warm and inviting atmosphere. Its sleek design blends seamlessly into any decor, making it ideal for residential and commercial spaces. Energy-efficient and easy to install, this fixture enhances the ambiance in kitchens, living rooms, and offices alike.

Aura

TECHNICAL DATA

MOUNTING

Mounting location:	Ceiling
Type:	Surface

ELECTRICAL

Voltage :	220V
Frequency :	50/60Hz

LIGHT

Adjustibility :	Fixed
Unified glare rating(UGR) :	<19

LAMP DESCRIPTION

Lamp type :	SMD
Colour rendering index (CRI) :	Ra>90
MacAdam :	<3
LED Llife :	L80B20-50000 Hrs
Environment temperature:	-20℃~40℃
Ingress protection:	IP20

NOMINAL FLUX

3000K: 8W - 680lm | 15W - 1230lm
4000K: 8W - 816lm | 15W - 1494lm
5000K: 8W - 920lm | 15W - 1635lm


PRODUCT DESCRIPTION

Surface Mount Diffused Downlight provides soft, even illumination, perfect for creating a warm and inviting atmosphere. Its sleek design blends seamlessly into any decor, making it ideal for residential and commercial spaces. Energy-efficient and easy to install, this fixture enhances the ambiance in kitchens, living rooms, and offices alike.

PHOTO



DIMENSIONS



DIMENSIONS

RECOMMEND:

ON/OFF

Finish

White


Color Temperature

3000K | 4000K | 5000K

UGR<19 Fixed

ORDER TEMPLATE


Model Code	Power	CCT	CRI	Beam Angle	Body Color	Dimming	IP
SM104508	☐ 08W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90	☐ 80° Diffused	☐ White	☐ On-Off	☐ 44
SM104515	☐ 12W	☐ 3000K ☐ 4000K ☐ 5000K	☐ 90	☐ 80° Diffused	☐ White	☐ On-Off	☐ 44

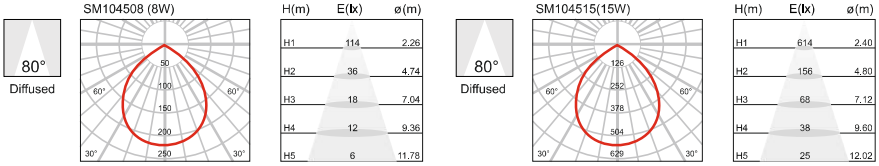

LED STRIP


2216 SERIES

LED strips powered by tiny SMD 2216 chips and a double-layer copper PCB. This design ensures superior heat dissipation and improved conductivity, delivering bright, consistent illumination with extended lifespan. Ideal for commercial or residential use, these strips are perfect for creative lighting designs and seamless installation.

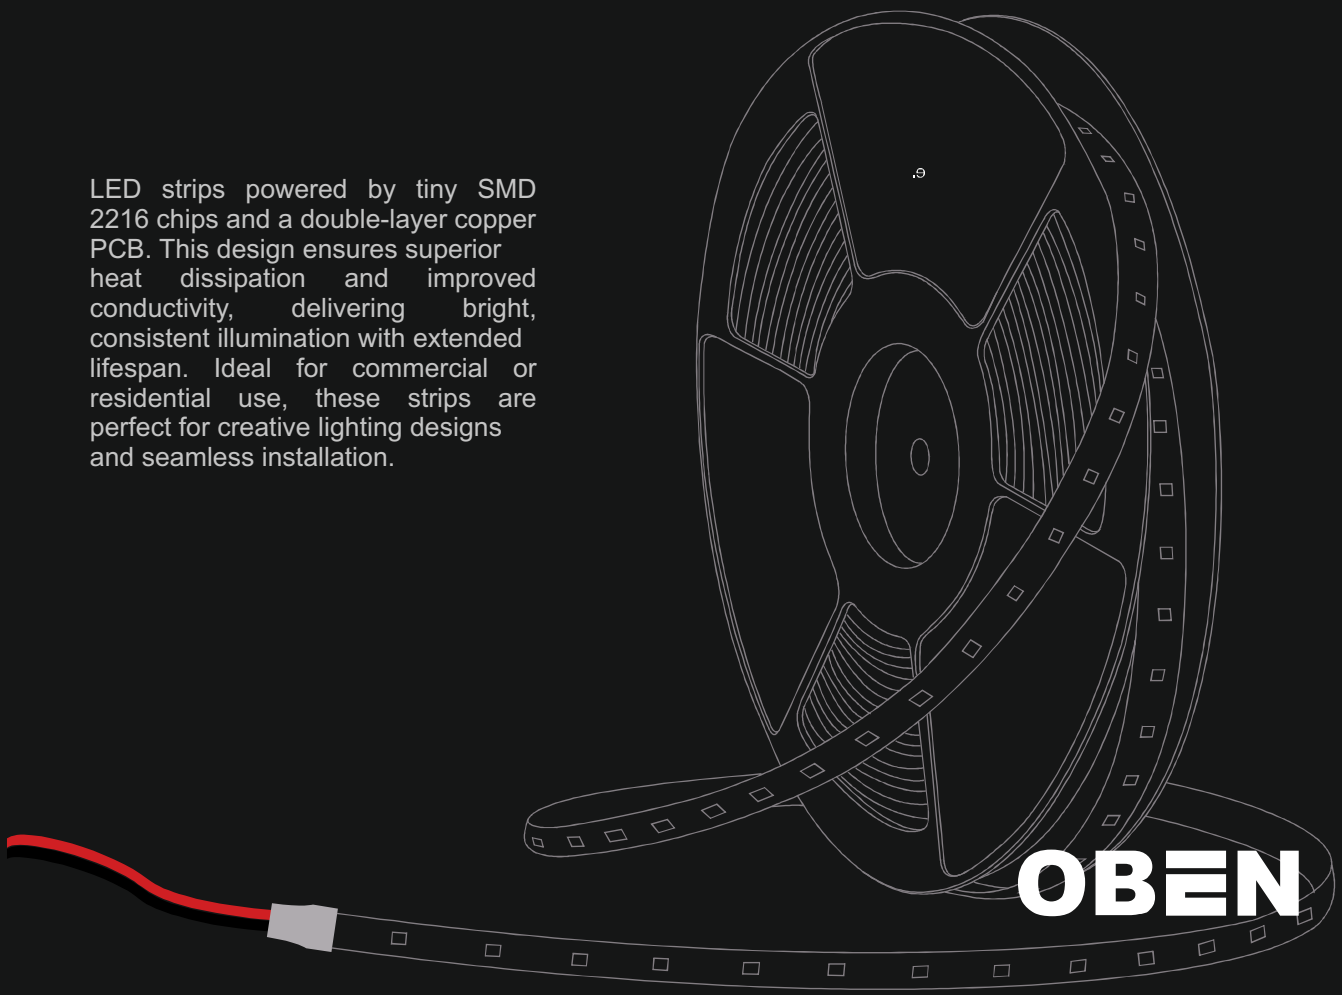

2216 Series

LED strips powered by tiny SMD 2216 chips and a double-layer copper PCB. This design ensures superior heat dissipation and improved conductivity, delivering bright, consistent illumination with extended lifespan. Ideal for commercial or residential use, these strips are perfect for creative lighting designs and seamless installation.

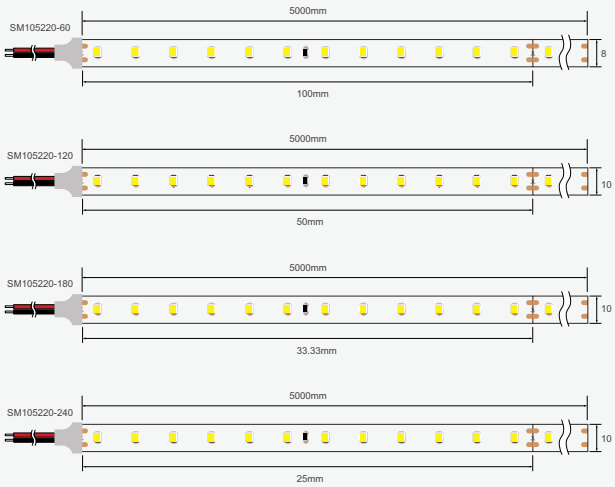



IP20 | CRI ≥85

LED: OSRAM bridgelux

CONTROL PROTOCOL

ON/OFF | DALI | 1-10V | TRIAC | zigbee

OTHER VERSIONS:

Model No	Voltage	CCT	LED Type	CRI	No of LEDs Per Meter	Max Lumens/M (4000K)	Max Power Per Meter	PCB Width (mm)	PCB Type	Protection Grade
SM105220-60	24V	☐2700K ☐3000K ☐4000K ☐5000K ☐6000K	SMD 2216	90	60	456lm	4.8W/M	☐5mm ☐8mm	2oz + 2 layer	☐IP 20 ☐IP 65
SM105220-120	24V	☐2700K ☐3000K ☐4000K ☐5000K ☐6000K	SMD 2216	90	120	912lm	7.2W/M	☐10mm	2oz + 2 layer	☐IP 20 ☐IP 65
SM105220-180	24V	☐2700K ☐3000K ☐4000K ☐5000K ☐6000K	SMD 2216	90	180	1368lm	14.4W/M	☐10mm	2oz + 2 layer	IP20
SM105220-240	24V	☐2700K ☐3000K ☐4000K ☐5000K ☐6000K	SMD 2216	90	240	1824lm	17.8W/M	☐5mm ☐10mm	3oz + 2 layer	IP20


Suitable Profile



Order Code : OL01-810



Order Code : OL02-810



Order Code : OL03-810



Order Code : OL04-810



Order Code : OL09-810

LOR : 80%







OBEN

SM105221-120 Full Spectrum

LED TAPE FULL SPECTRUM


(Two LED Chip)

SMD2835 10MM 120LEDs/M


2835 - Full Spectrum

OBEN

- Artificial full-spectrum LED lights that simulate the sunlight spectrum
- RA ≧ 97, high color rendering index, high color reproduction ability.
- With genuine 3M adhesive on the back, the flexible light panel has a bendable and cuttable design for easy installation and length adjustment.
- IP20/IP65/IP67 multiple waterproof levels and waterproof processes are available
- Suitable for educational and training institutions, art exhibitions halls, offices, home lighting and other places.

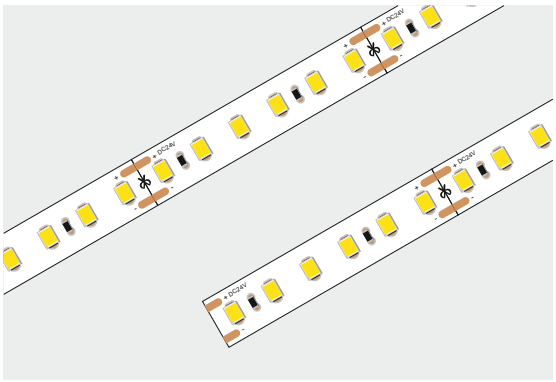


Dimension

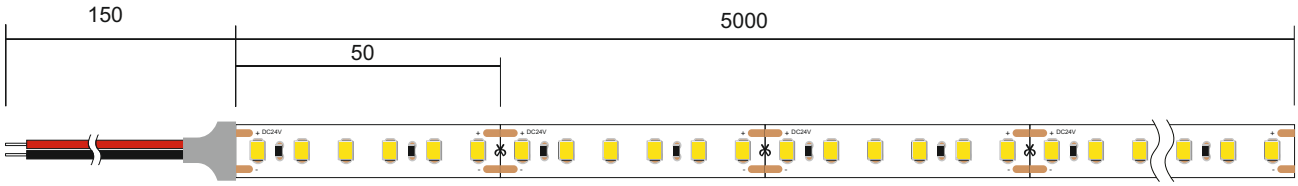

Model No	Voltage	CCT	LED Type	CRI	No of LEDs Per Meter	Max Lumens/M (4000K)	Max Power Per Meter	PCB Width (mm)	PCB Type	Protection Grade
SM105221-60	24V	☐2700K ☐3000K ☐4000K ☐6000K	SMD 2835	97	60	1050lm	10W/M	☐5mm	2oz + 2 layer	IP20
SM105221-120	24V	☐2700K ☐3000K ☐4000K ☐6000K	SMD 2835	97	120	1468lm	14.4W/M	☐5mm	2oz + 2 layer	IP20
SM105221-140	24V	☐2700K ☐3000K ☐4000K ☐6000K	SMD 2835	97	140	2472lm	24W/M	☐10mm	2oz + 2 layer	IP20


Suitable Profile


Order Code : OL01-810
LOR : 80%



Order Code : OL02-810





Order Code : OL03-810





Order Code : OL04-810



Order Code : OL09-810

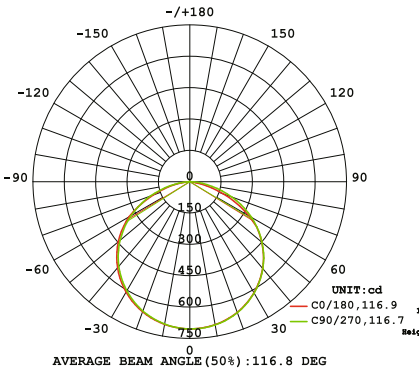

Light Distr ibution C urve



No te:The Curvesindicate the illuminated area and the average illumination when the luminair e is at different dist ance.

Effective Average Illuminanc e

CCT (K)	Power (W/M)	Lumen (LM/M)	Max.run length(M)	CV/CC
2700	24W	1884.0	5	CV
3000	24W	2001.6	5	CV
3500	24W	2088 .0	5	CV
4000	24W	2092.8	5	CV
5000	24W	2148.0	5	CV
5700	24W	2176.8	5	CV

*CV: Constant Voltage, CC: Constant Current.


No te: The above date is based on 24V ,10W/M,single colour with 4000k colour temperature.If you need IES files for other types.Please contact our sales depar tment .

190 lm/w

SMD 2835

High Efficiency LED Strip

2835 SERIES

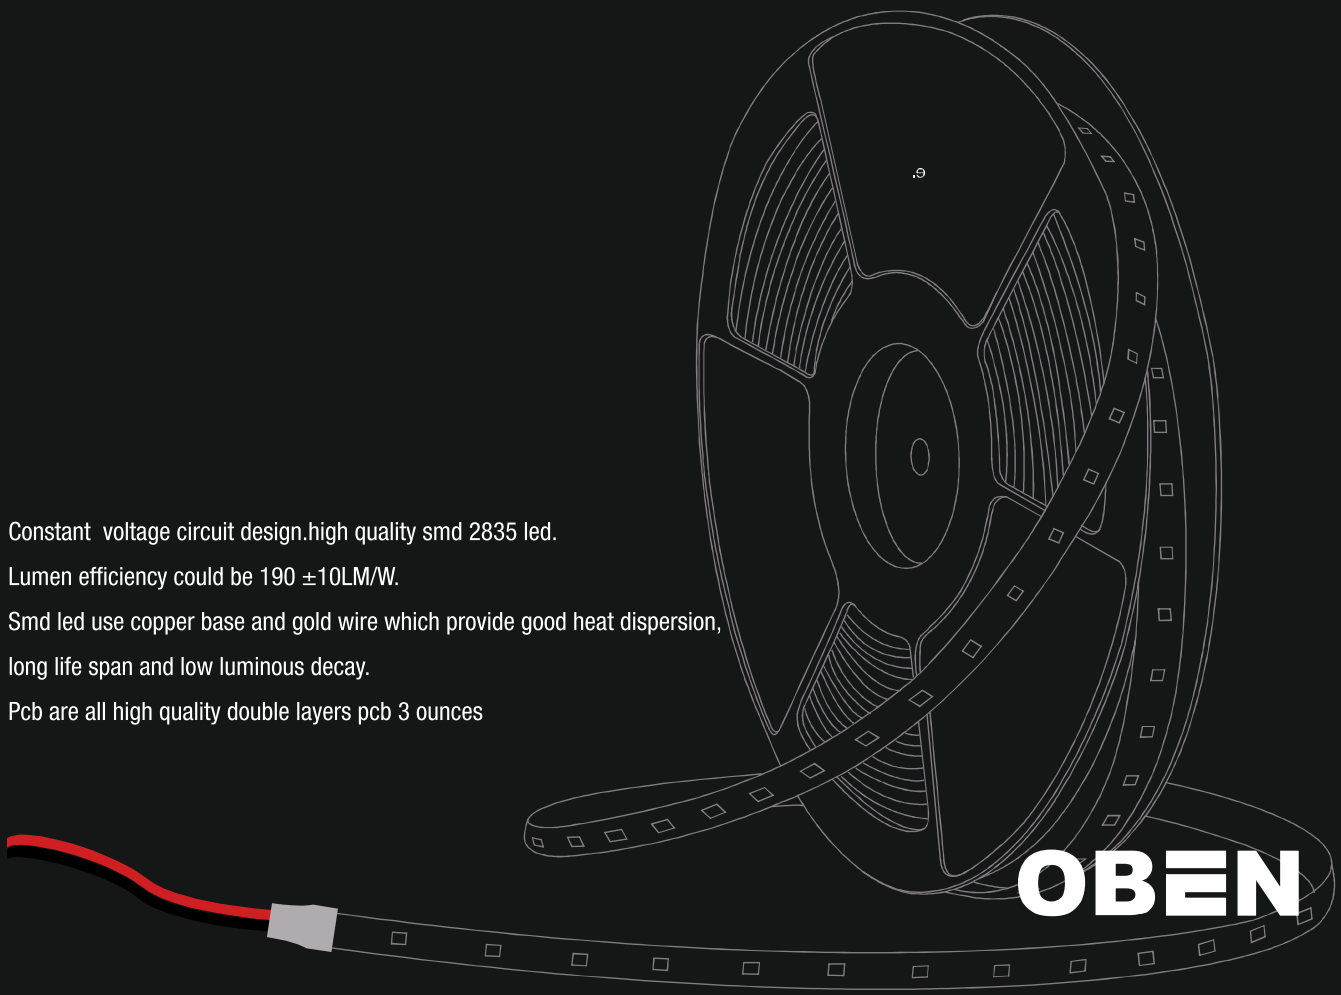


- Constant voltage circuit design.high quality smd 2835 led.
- Lumen efficiency could be 190 ±10LM/W.
- Smd led use copper base and gold wire which provide good heat dispersion, long life span and low luminous decay.
- Pcb are all high quality double layers pcb 3 ounces

OBEN

2835 High Lumen Series

High-efficiency LED strip featuring a heavy gauge copper PCB for superior thermal management and durability. Producing an impressive 190 lumens per watt, this strip ensures bright, energy-efficient illumination ideal for any space. Perfect for accent lighting or full-room applications, it blends performance with reliability seamlessly.

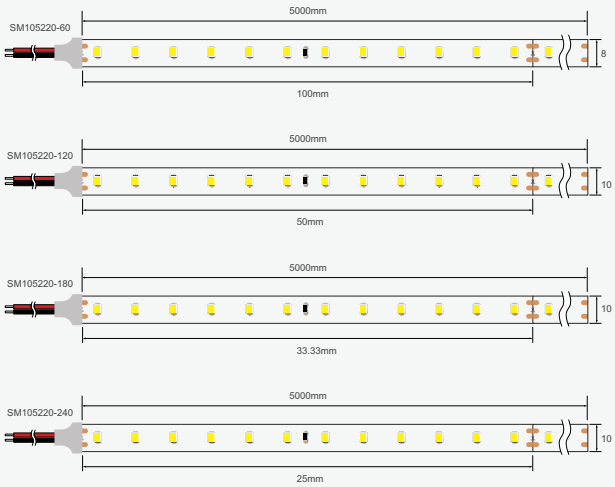

IP20 | CE | RoHS | CRI ≥85



LED: OSRAM bridgelux

CONTROL PROTOCOL

ON/OFF | DALI | 1-10V | TRIAC | zigbee

OTHER VERSIONS:

Model No	Voltage	CCT	LED Type	CRI	No of LEDs Per Meter	Max Lumens/M (4000K)	Max Power Per Meter	PCB Width (mm)	PCB Type	Protection Grade
SM105222-60	24V	☐2700K ☐3000K ☐4000K ☐6000K	SMD 2835	90	60	1440lm	12W/M	☐8mm	2oz + 2 layer	IP20
SM105222-120	24V	☐2700K ☐3000K ☐4000K ☐6000K	SMD 2835	90	120	1728lm	14.4W/M	☐5mm	2oz + 2 layer	IP20


Suitable Profile



Order Code : OL01-810
LOR : 80%




Order Code : OL02-810



Order Code : OL03-810




Order Code : OL04-810



Order Code : OL09-810



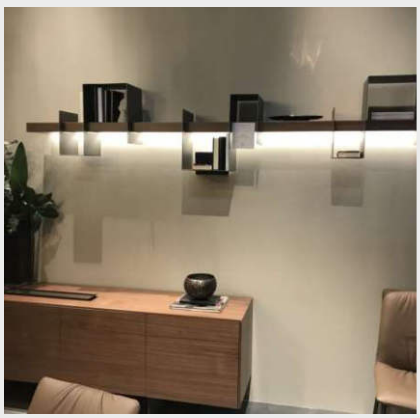



6060 LENS SERIES




Integration of light source and lens .SMD6060 LED light source
The top of lens processed the secondary optics, 160°light beam angle, larger emitting angle.
Use environmental silicone glue material, high light transmittance, strong compression resistance .
Large area holder heat sink ,fast heat conduction, small light beam
Can be cut, feel free to cut and solder along the above cutting line.


OBEN

6060 Lens


- Integration of light source and lens .SMD6060 LED light source
- The top of lens processed the secondary optics, 160°light beam angle, larger emitting angle.
- Use environmental silicone glue material, high light transmittance, strong compression resistance .
- Large area holder heat sink ,fast heat conduction, small light beam
- Can be cut, feel free to cut and solder along the above cutting line.

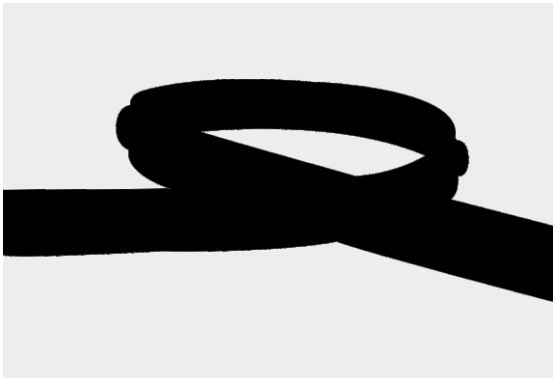

Dimension

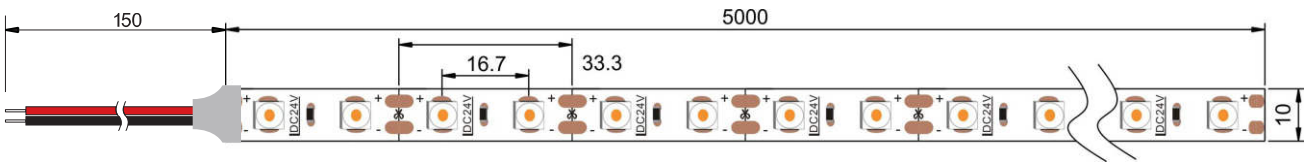

Model No	Voltage	CCT	LED Type	CRI	No of LEDs Per Meter	Max Lumens/M (4000K)	Max Power Per Meter	PCB Width (mm)	PCB Type	Protection Grade
SM105224-60	24V	☐2700K ☐3000K ☐4000K ☐6000K	COB	90	60	2175lm	20W/M	☐10mm	2oz + 2 layer	IP20

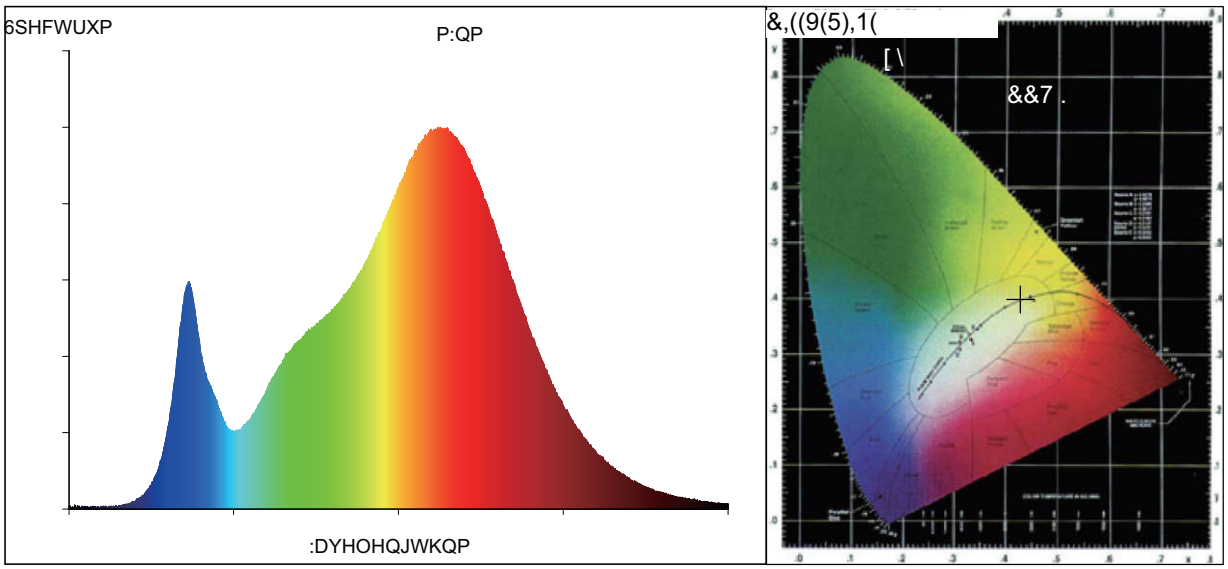

Color Parameters:


Chromaticity Coordinate:x=0.4348 y=0.3951/u'=0.2531 v'=0.5175
CCT=2961K(Duv=-0.0033) Dominant WL:Ld =584.3nm Purity=49.1%
Ratio:R=23.6% G=73.6% B=2.8% Peak WL:Lp=605.3nm FWHM=122.5nm
Render Index:Ra=84.0 AvgR=79.3
R1 =84 R2 =94 R3 =94 R4 =82 R5 =84 R6 =92 R7 =82
R8 =60 R9 =13 R10=85 R11=82 R12=77 R13=86 R14=98 R15=77

Photo Parameters:

Flux = 2013 lm Eff.: 99.48 lm/W Fe = 8.006 W

Electrical parameters:

V = 23.998 V	I = 0.84 A	P = 20 W	PF = 1.000
LEVEL:OUT	WHITE:ANSI_3000K		
Status: Integral	T = 100 ms	Ip = 5314 (8%)	

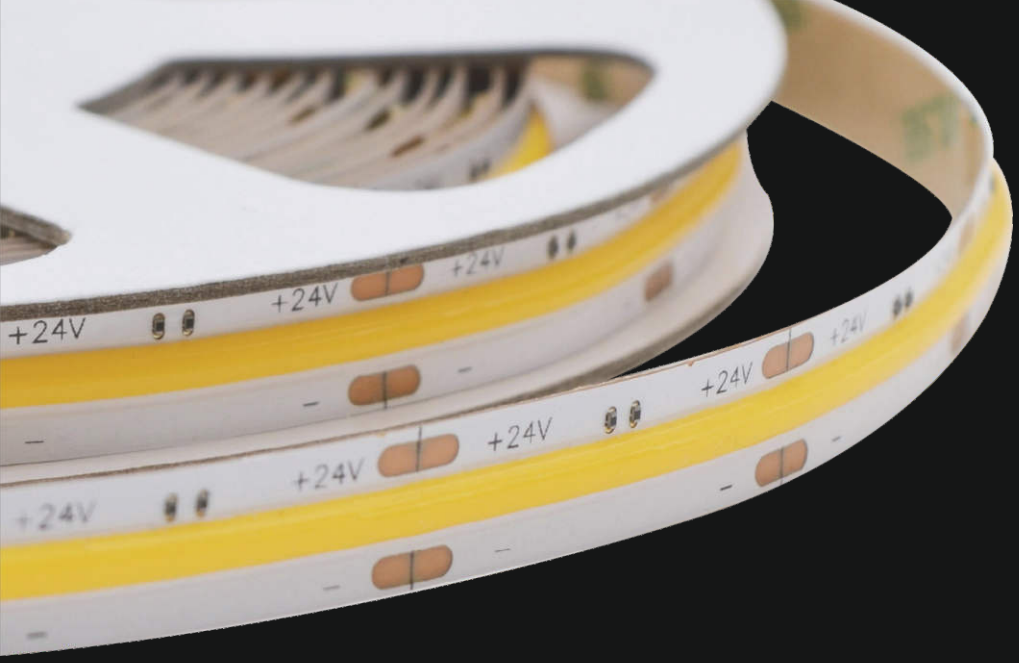


480
LEDs/m

DOTLESS COB SERIES


1. No spot, no shadow, soft light.
2. The antistatic grade (MIL - STD - 883 - e) : HBM level 2 (2000 ~ 4000 v)
3. The largest emitting angle can reach to 180°
4. Can be cut,and be free to cut o ffand weld along with the above cutting line.

Dotless COB

- No spot, no shadow, soft light.
- The antistatic grade (MIL - STD - 883 - e) : HBM level 2 (2000 ~ 4000 v)
- The largest emitting angle can reach to 180°
- Can be cut,and be free to cut off and weld along with the above cutting line.

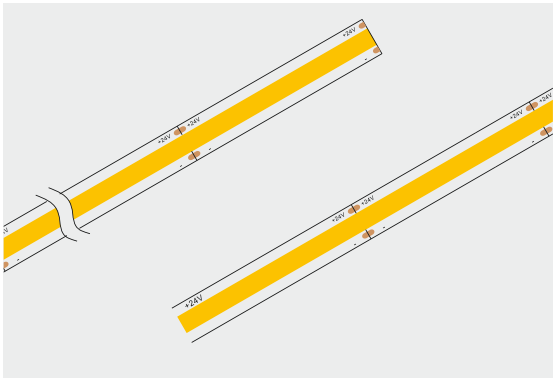

Dimension

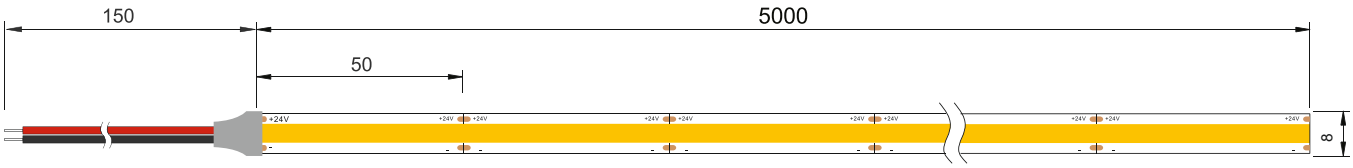


Model No	Voltage	CCT	LED Type	CRI	No of LEDs Per Meter	Max Lumens/M (4000K)	Max Power Per Meter	PCB Width (mm)	PCB Type	Protection Grade
SM105223-480	24V	☐2700K ☐3000K ☐4000K ☐6000K	COB	90	480	1162lm	10W/M	☐8mm	2oz + 2 layer	IP20

Suitable Profile


Order Code : OL01-810
LOR : 80%



Order Code : OL02-810


Order Code : OL03-810





Order Code : OL04-810


Order Code : OL09-810

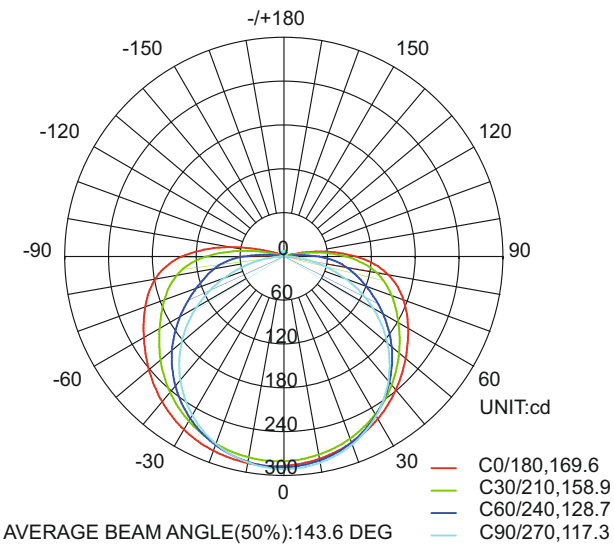

AVERAGE BEAM ANGLE(50%):143.6 DEG

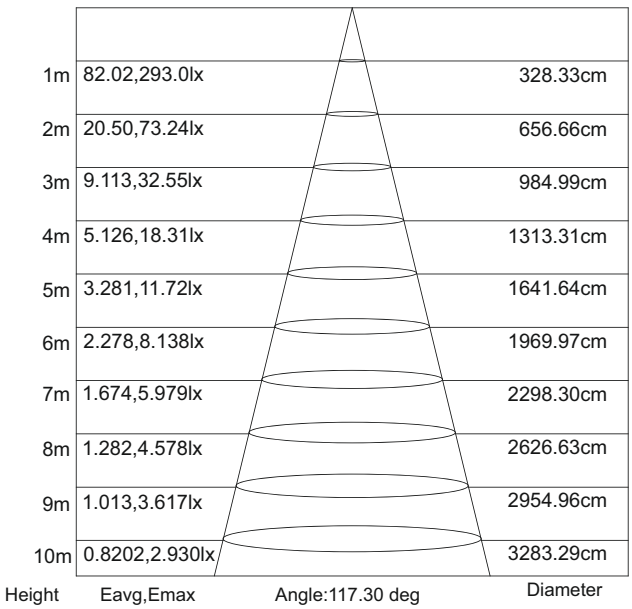

OBEN



NEON
SERIES


Our Neon Series are made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material; It's integrated extrusion molding process, uniform lighting surface and no shadow; IP67 and IP68 protection level, salt solution resistance, acids & alkalis and UV resistance; 3 & 5 years warranty are available, Surface frosting process is optional.

Top **Bend**


SN105220-0606 Top Bend

OBEN

- 6x6mm FLEX LED NEON is Vertical bending with diameter of 50mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.



Min bending diameter




Unit: mm
Cross section



Accessories : Mounting Clip and Mounting Channel

Dimension

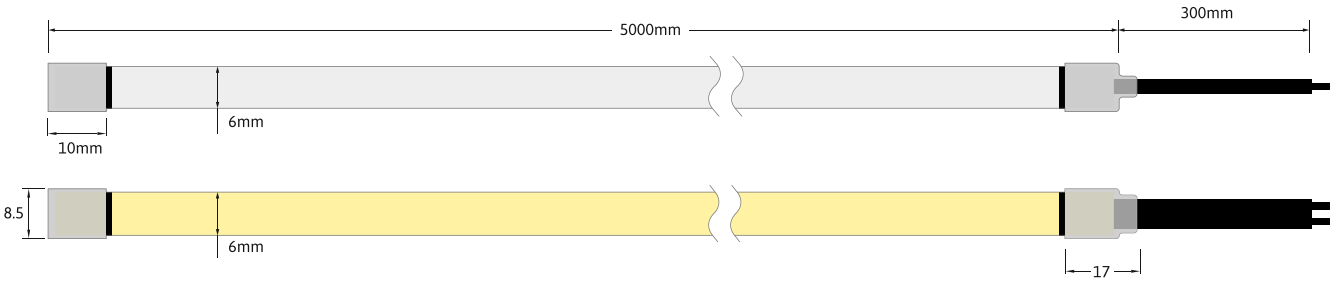

Technical Data

CCT(K)	2700K, 3000K, 4000K, 6000K
Working Voltage	DC24V
CRI	>90
Rated Power/m	6w
Storage Temperature	-25 C ~60 C
Ambient Temperature	Ta_{min}=-25 C , Ta_{max} (Table below)

Model No. : SN105220-0606	Low Output
Power[W/m]	6W
Max.Ambient tempt.(Ta_{max})	55 C

Color	Single color
CCT(K)	3200K +300 −200
CRI	⩾90
Voltage	DC24V
Power(W)	6
Lumen(LM/M)	348
Unit Length (mm)	25
Max. Run Length(M)	5
CC/CV	CV

Note:

-Max. run length refers to single side feed in serial connection.

-The given data are typical values due to the tolerances of the productionprocess and the electrical components, values for light output and electrical power can vary up to 10%.

-The given color temperature is the temperature of finished product.

Voltage
24v DC

UV
Protection

Consistency
One Bin

Length
5M


Waterproof Grade
IP 67

Warranty
5 Years


SN105221-1615 Top Bend

OBEN

- 16x15mm FLEX LED NEON is Vertical bending with diameter of 200mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 and IP68 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.




Min bending diameter



Unit: mm
Cross section



Dimension

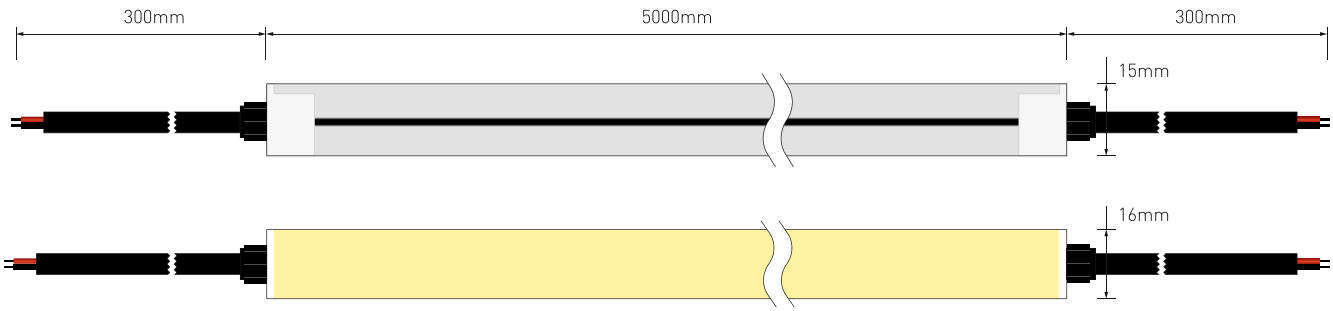

Technical Data	
CCT(K)	2700K, 3000K, 4000K, 6000K , 1800K~6500K Tunable Red , Green , Blue , Yellow , Pink, RGB, RGBW
Working Voltage	DC24V
CRI	>90
Rated Power/m	5w/10w/15w
Storage Temperature	-25℃~60℃
Ambient Temperature	Ta_{min}=-25℃, Ta_{max} (Table below)

Model No. : SN105220-1615	Low Output	Std Output	High Output
Power[W/m]	5W	10W	15W
Max.Ambient tempt.(Ta_{max})	55℃	45℃	35℃

Color	Single color	CCT Tunable	RGB	RGBW
CCT(K)	3000K±150	W+WW	RGB	RGB+WW(3000K)
CRI	⩾90	⩾90	--	--
Voltage	DC24V	DC24V	DC24V	DC24V
Power(W)	10	10	10	10
Lumen(LM/M)	540	570	270	360
Unit Length (mm)	50	50	62.5	62.5
Max. Run Length(M)	17(CC)	5	5	5
CC/CV	CC/CV	CV	CV	CV

Note:

-When ambient temperature reaches 55℃, the power is suggested to be 5W/M.

-Max. run length refers to single side feed in serial connection.

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

-The given color temperature is the temperature of finished product.

Voltage
24v DC


UV
Protection

Consistency
One Bin

Length
5M


Waterproof Grade
IP 67


Warranty
5 Years

	Integral End Cap	Solder Free End Cap	Silicone end cap
Front Cable Entry: The cable could be hidden in all directions by the flexible design.			
Side Cable Entry: The cable could be perfectly hidden to achieve seamless light connection.			
Bottom Cable Entry: The cable could be perfectly hidden to achieve seamless light connection.			

Accessories

Mounting Clips






Dimension:
20x12.6x16.8mm


Curved aluminum profile







Dimension:51.4x30.4x15mm
Accessories:
Screw M3x15mm

Aluminium Profile







Dimension:
1000x20.5x17.6




PVC Cable
2PIN, 3PIN, 4PIN, 5PIN
Color: Black




IP67 Connector
2PIN, 3PIN, 4PIN, 5PIN
Wire Gauge: 0.5mm²/22AWG
Color: Black




Silicone Cable
2PIN, 3PIN, 4PIN, 5PIN
Color: White




Anti-rain connector



Silicone closed end cap
Dimension: 13x18.5x17.5mm
Color: Semi-Transparent



PC closed end cap
Dimension: 27.9x20.4x19.4mm
Material: stainless steel
Color: Transparent




Scissor
Material: stainless steel


SN105222-1212 Top Bend

OBEN

- 12x12mm FLEX LED NEON is Vertical bending with diameter of 150mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.




Min bending diameter



Unit: mm
Cross section



Dimension

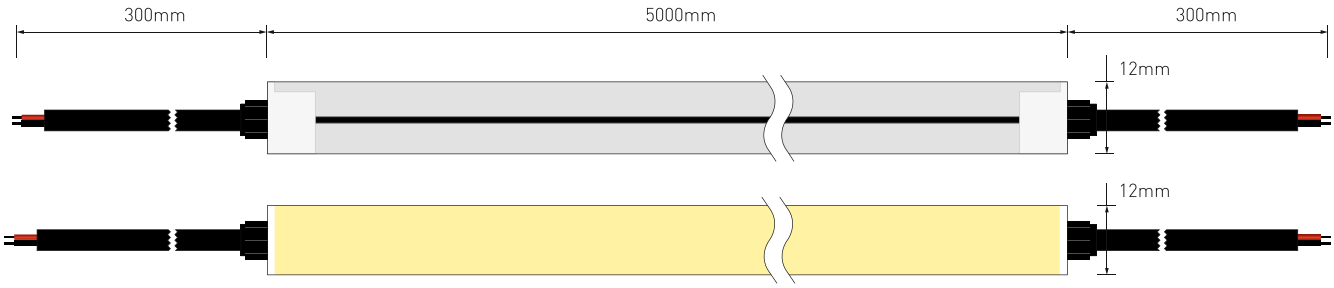

Technical Data	
CCT(K)	2700K, 3000K, 4000K, 6000K , 1800K~6500K Tunable Red , Green , Blue , Yellow , Pink, RGB
Working Voltage	DC24V
CRI	>90
Rated Power/m	5w/10w
Storage Temperature	-25℃~60℃
Ambient Temperature	Ta_{min}=-25℃, Ta_{max} (Table below)

Model No. : SN105222-1212	Low Output	STD Output
Power[W/m]	5W	10W
Max.Ambient tempt.(Ta_{max})	55℃	45℃

Color	Single color	CCT Tunable	RGB
CCT(K)	3000K±150	W+WW	RGB
CRI	⩾90	⩾90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	640	650	290
Unit Length (mm)	50	50	62.5
Max. Run Length(M)	13(CC)	5	5
CC/CV	CC/CV	CV	CV

Note:

-When ambient temperature reaches 55℃, the power is suggested to be 5W/M.

-Max. run length refers to single side feed in serial connection.

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

-The given color temperature is the temperature of finished product.

Voltage
24v DC

UV
Protection

Consistency
One Bin

Length
5M

Waterproof Grade
IP 67


Warranty
5 Years

	Integral End Cap	Solder Free End Cap	Silicone end cap
Front Cable Entry: The cable could be hidden in all directions by the flexible design.			
Side Cable Entry: The cable could be perfectly hidden to achieve seamless light connection.			
Bottom Cable Entry: The cable could be perfectly hidden to achieve seamless light connection.			

Accessories

Stainless Steel Mounting clips






Dimension:
20x12.8x12.4mm

Curved aluminum profile







Dimension: 13*9*1000mm
Accessories:
Screw M3x15mm

Aluminium Profile







Dimension:
1000x17.3x14




PVC Cable
2PIN, 3PIN, 4PIN
Color: Black



IP67 Connector 4PIN
Wire Gauge: 0.5mm²/22AWG
Color: Black



Silicone Cable
2PIN, 3PIN, 4PIN
Color: White



Anti-rain connector



Silicone closed end cap
Dimension: 13x14.5x14.5mm
Color: Semi-Transparent



PC closed end cap
Dimension: 26.5x17x16mm
Material: stainless steel
Color: Transparent




Scissor
Material: stainless steel


SN105223-0612 Side Bend

OBEN

- 6x12mm Side bend FLEX LED NEON is horizontal bending with diameter of 50mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.




Min bending diameter



Unit: mm
Cross section



Dimension

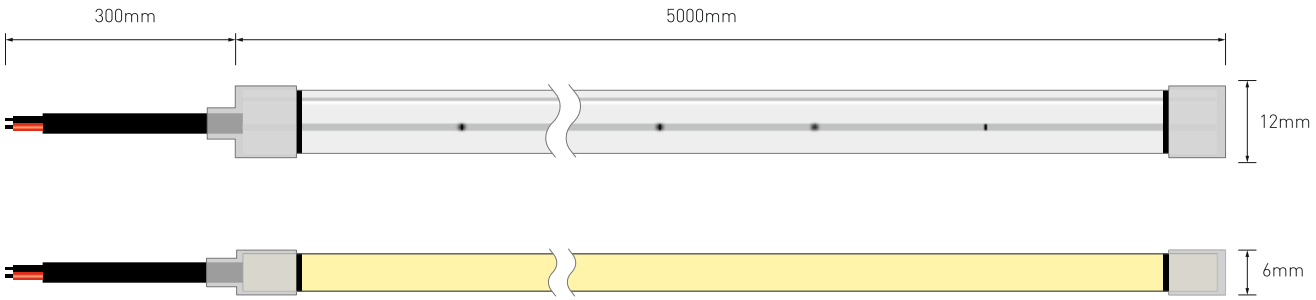

Technical Data	
CCT(K)	2700K, 3000K, 4000K, 6000K , 1800K~6500K Tunable Red , Green , Blue , Yellow , Pink, RGB
CRI	>90
Rated Power/m	5w/10w
Storage Temperature	-25℃~60℃
Ambient Temperature	Ta_{min}=-25℃, Ta_{max} (Table below)

Model No. : SN105223-0612	Low Output	STD Output
Power[W/m]	5W	10W
Max.Ambient tempt.(Ta_{max})	55℃	45℃

Color	Single color	CCT Tunable	RGB
CCT(K)	3000K±150	W+WW	RGB
CRI	⩾90	⩾90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	300	270	130
Unit Length (mm)	50	50	50
Max. Run Length(M)	13(CC)	5	5
CC/CV	CC/CV	CV	CV

Note:

-Max. run length refers to single side feed in serial connection.

-The given data are typical values due to the tolerances of the productionprocess and the electrical components, values for light output and electrical power can vary up to 10%.

-The given color temperature is the temperature of finished product.

Voltage
24v DC

UV
Protection

Consistency
One Bin

Length
5M


Waterproof Grade
IP 67

Warranty
5 Years


SN105224-1220 Side Bend

OBEN

- 12x20mm Side bend FLEX LED NEON is horizontal bending with diameter of 150mm; It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high
- transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 and IP68 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV; 3 & 5 years warranty are available, Surface frosting process is optional.




Min bending diameter



Unit: mm
Cross section



Dimension

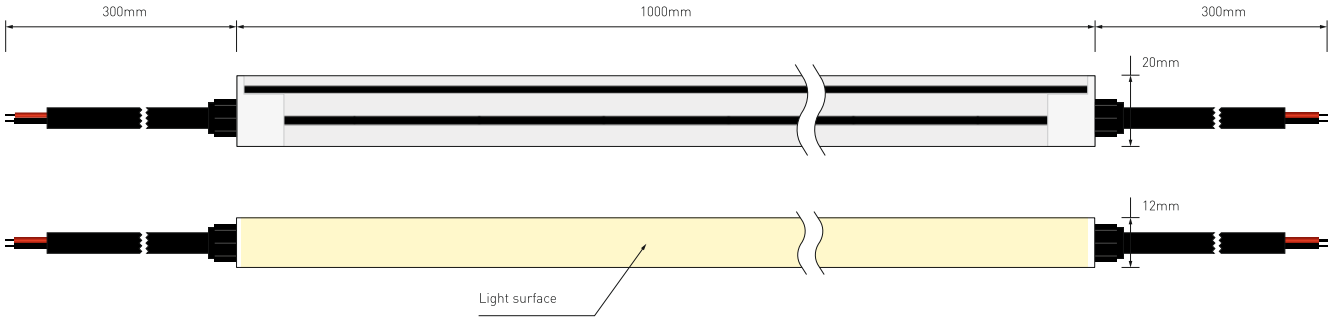

Technical Data	
CCT(K)	2700K, 3000K, 4000K, 6000K , 1800K~6500K Tunable Red , Green , Blue , Yellow , Pink, RGB, RGBW
Working Voltage	DC24V
CRI	>90
Rated Power/m	5w/10w/15w
Storage Temperature	-25℃~60℃
Ambient Temperature	Ta_{min}=-25℃, Ta_{max} (Table below)

Model No. : SN105224-1220	Low Output	STD Output	High Output
Power[W/m]	5W	10W	15W
Max.Ambient tempt.(Ta_{max})	55℃	45℃	35℃

Color	Single color	CCT Tunable	RGB	RGBW
CCT(K)	3000K±150	W+WW	RGB	RGB+WW(3000K)
CRI	⩾90	⩾90	--	--
Voltage	DC24V	DC24V	DC24V	DC24V
Power(W)	10	10	10	10
Lumen(LM/M)	310	354	160.0	220
Unit Length (mm)	50	50	62.5	62.5
Max. Run Length(M)	17(CC)	5	5	5
CC/CV	CC/CV	CV	CV	CV

Note:

-When ambient temperature reaches 55℃, the power is suggested to be 5W/M.

-Max. run length refers to single side feed in serial connection.

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

-The given color temperature is the temperature of finished product.

Voltage
24v DC


UV
Protection

Consistency
One Bin

Length
5M

Waterproof Grade
IP 67


Warranty
5 Years

	Integral end cap	Solder Free End Cap	Silicone end cap
Front Cable Entry: The cable could be hidden in all directions by the flexible design.			
Side Cable Entry: The cable could be perfectly hidden to achieve seamless light connection.			
Bottom Cable Entry: The cable could be perfectly hidden to achieve seamless light connection.			

Accessories

Stainless Steel Mounting Clip






Dimension:
20x12.6x18.9mm(L x W x H)

Curved aluminum profile






Dimension: 13.5*18*1000mm
Accessories:
Screw M3x15mm

Aluminium Profile





Dimension:
1000x17.3x21mm(L x W x H)



PVC Cable
2PIN, 3PIN, 4PIN
Color: Black




IP67 Connector 4PIN
Wire Gauge: 0.5mm²/22AWG
Color: Black




Silicone Cable
2PIN, 3PIN, 4PIN
Color: White




Anti-rain connector



Silicone closed end cap
Dimension: 13x14.5x14.5mm
Color: Semi-Transparent



PC closed end cap
Dimension: 26.5x17x16mm
Material: stainless steel
Color: Transparent



Scissor
Material: stainless steel


SN105225-1615-3D

OBEN


- 3D 16x15mm FLEX LED NEON can Top bend and Side bend.
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.




Dimension

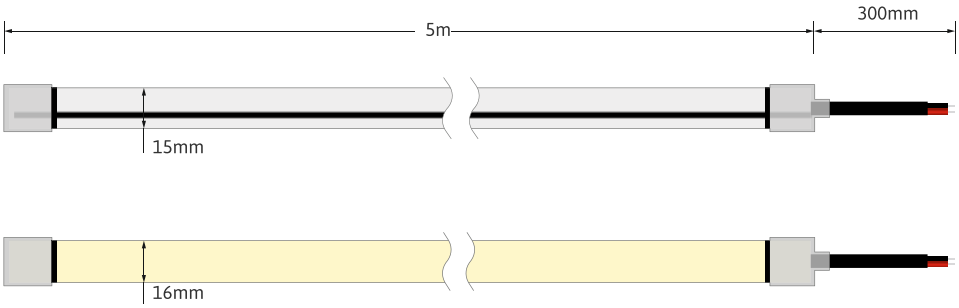


Top bend

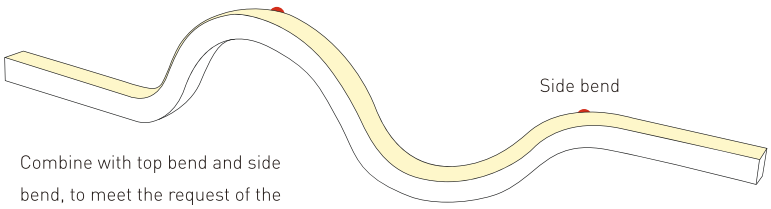

Combine with top bend and side bend, to meet the request of the different space bend.



Cross section



Technical Data

CCT(K)	2700K, 3000K, 4000K, 6000K , 1800K~6500K Tunable Red , Green , Blue , Yellow , Pink, RGB
CRI	>90
Rated Power/m	5w/10w
Storage Temperature	-25 C ~60 C
Ambient Temperature	Ta_{min}=-25 C , Ta_{max} (Table below)

Model No. : SN105225-1615-3D	Low Output	STD Output
Power[W/m]	5W	10W
Max.Ambient tempt.(Ta_{max})	55 C	45 C

Color	Single color	CCT Tunable	RGB
CCT(K)	3000K±150	W+WW	RGB
CRI	⩾90	⩾90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	701	620	350
Unit Length (mm)	50	50	50
Max. Run Length(M)	13(CC)	5	5
CC/CV	CC/CV	CV	CV

Note:

-Max. run length refers to single side feed in serial connection.

-The given data are typical values due to the tolerances of the productionprocess and the electrical components, values for light output and electrical power can vary up to 10%.

-The given color temperature is the temperature of finished product.

Voltage
24v DC


UV
Protection

Consistency
One Bin

Length
5M


Waterproof Grade
IP 67

Warranty
5 Years

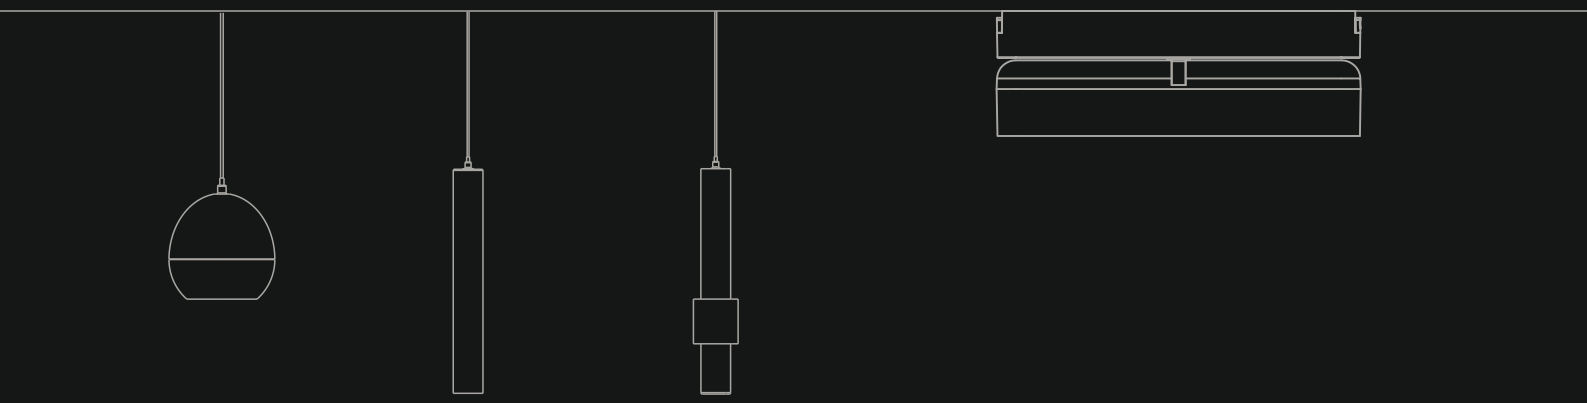

ULTRA SLIM TRACK
SERIES


OBEN

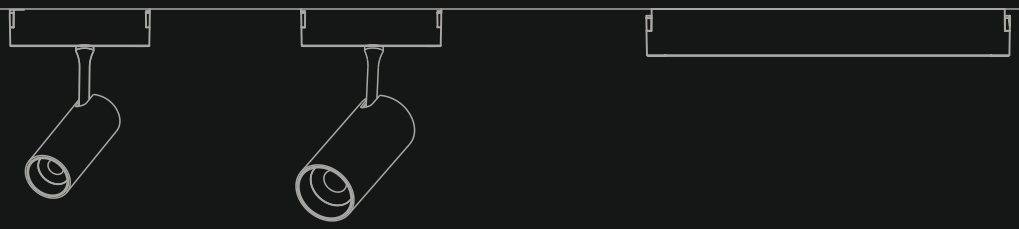


The Ultra Slim Magnetic Track Series offers a modern, flexible lighting solution for contemporary spaces. Featuring a sleek design and innovative magnetic connectors, it allows for easy customization and repositioning of light fixtures. Ideal for both residential and commercial use, this series provides bright, adjustable lighting while maintaining a minimalist aesthetic.


Ultra Slim

The width is only 25mm , the thickness is only 6mm
Ultra-thin line design to create a minimalist space

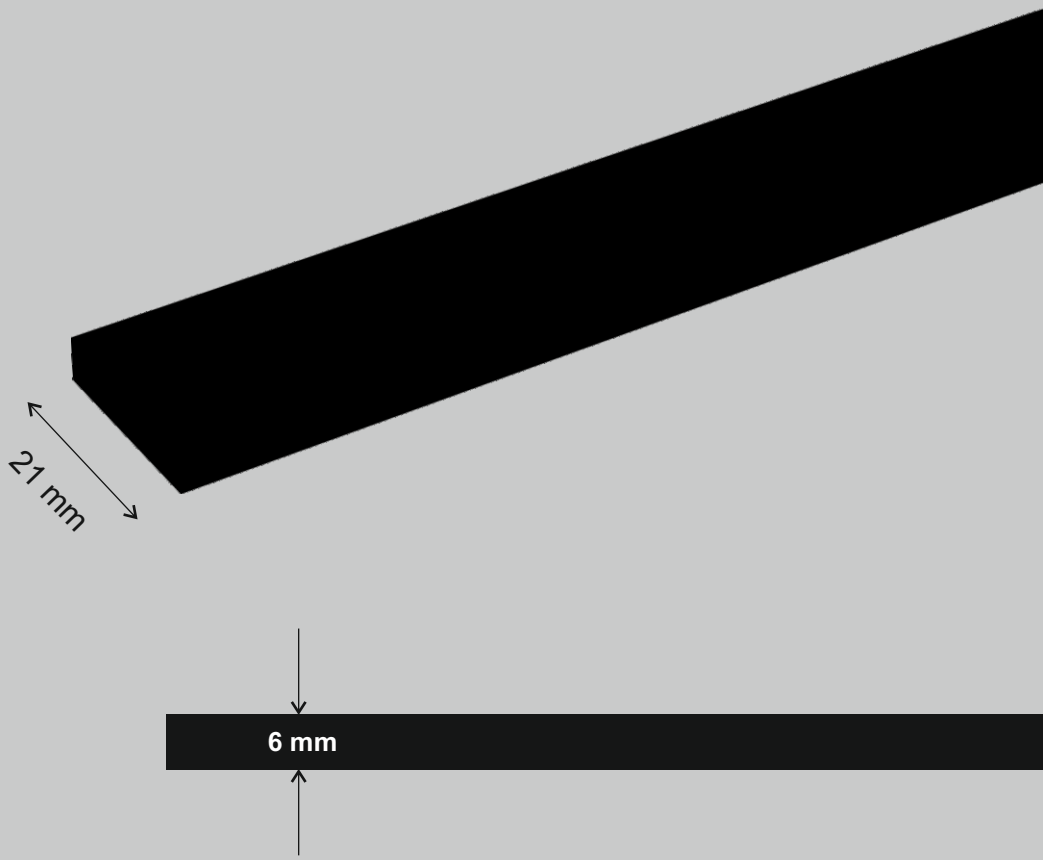

TR 25 Accessories

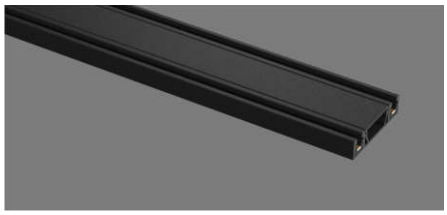





Ultra Slim Surface Rail

Product specification

Model	Size	Material
TR25-CB	25x6mm	AL & Copper

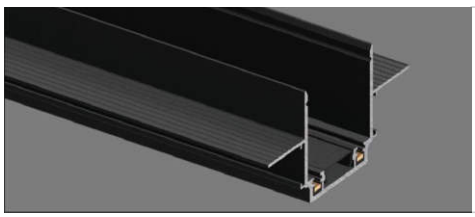





Deep Concealed Rail

Product specification

Model	Size	Material
TR25-A	62x38mm	AL & Copper

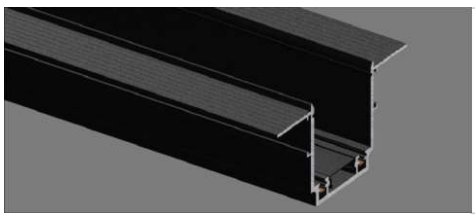




Concealed Rail

Product specification

Model	Size	Material
TR25-P	62x38mm	AL & Copper



TR 25 Cont - I



TR 25 Cont - L



TR 25 Cont - C



TR 25 Cont - V



TR 25 Cont - T



TR 25 Cont - X



TR 25 Cont - IN



TR 25 Cont - CN



TR 25 Cont - CN

TR 25 Power Supply



TR 25 Power Supply

TR 25 M-P200W


Watt	: 200W
Input Voltage	: AC 220V
Output Voltage	: DC 48V
Size	: L235 x W25 x H30


■ Matt Black ☐ Matt White

TR 25 Flood Light


SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

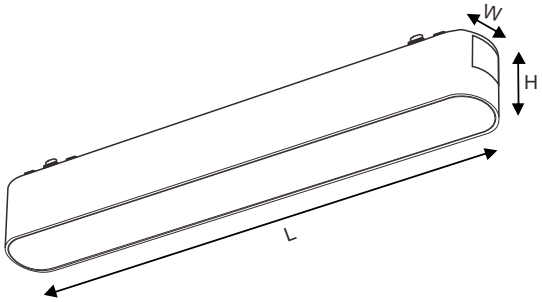

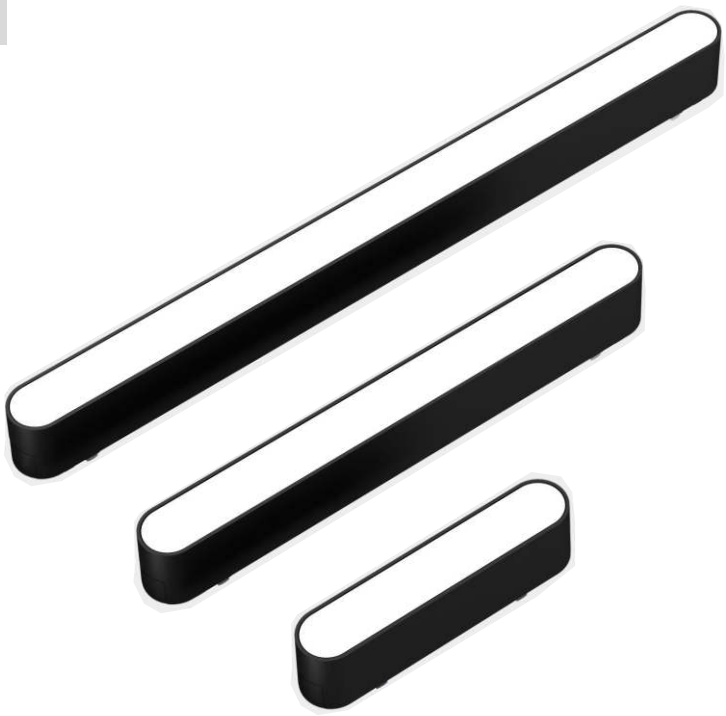

CW/NW/WW

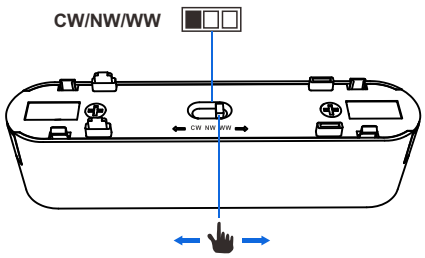


Beam angle



110°

The Diffused Fixed Ultra Slim Magnetic Track Light is available in 6, 12, and 18 watts, offering flexible brightness options for any environment. Its sleek design features soft, even illumination, and magnetic connections allow for effortless adjustment. Ideal for modern spaces, it provides both functionality and aesthetic appeal in one elegant package.



PHOTOMETRIC ON REQUEST

TECHNICAL DATA


■ Matt Black □ Matt White

Model	Size LxWxH	Power	Input Voltage	CCT	CRI
TR25-F6W	120x25x30mm	6W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-F12W	235x25x30mm	12W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-F18W	352x25x30mm	18W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Grille Light

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

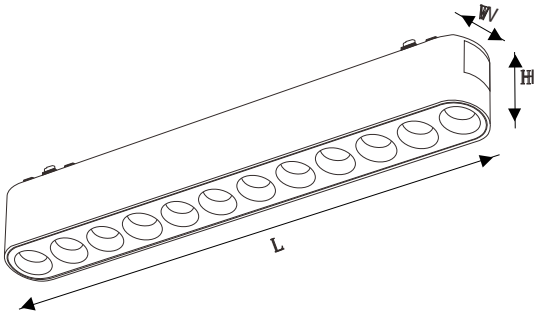




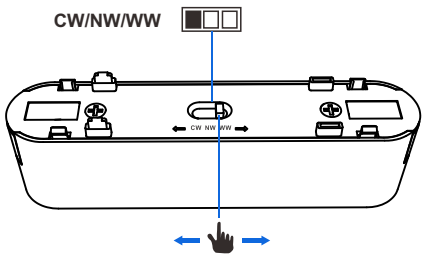

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



PHOTOMETRIC ON REQUEST

TECHNICAL DATA


■ Matt Black □ Matt White

Model	Size LxWxH	Power	Input Voltage	CCT	CRI
TR25-G6W	120x25x30mm	6W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-G12W	235x25x30mm	12W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-G18W	352x25x30mm	18W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Honeycomb Grille Light

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

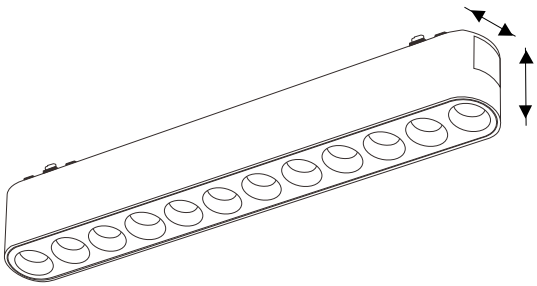




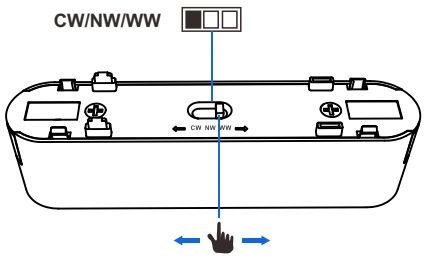

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



PHOTOMETRIC ON REQUEST

TECHNICAL DATA


■ Matt Black □ Matt White


Model	Size LxWxH	Power	Input Voltage	CCT	CRI
TR25-FW-G6W	120x25x30mm	6W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-FW-G12W	235x25x30mm	12W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-FW-G18W	352x25x30mm	18W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Folding Flood Light


SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

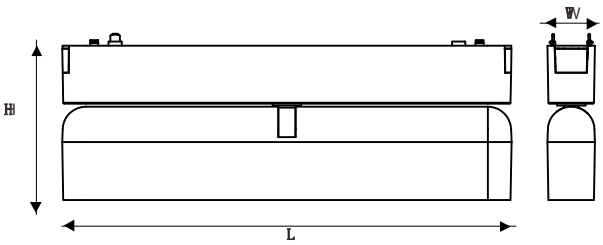

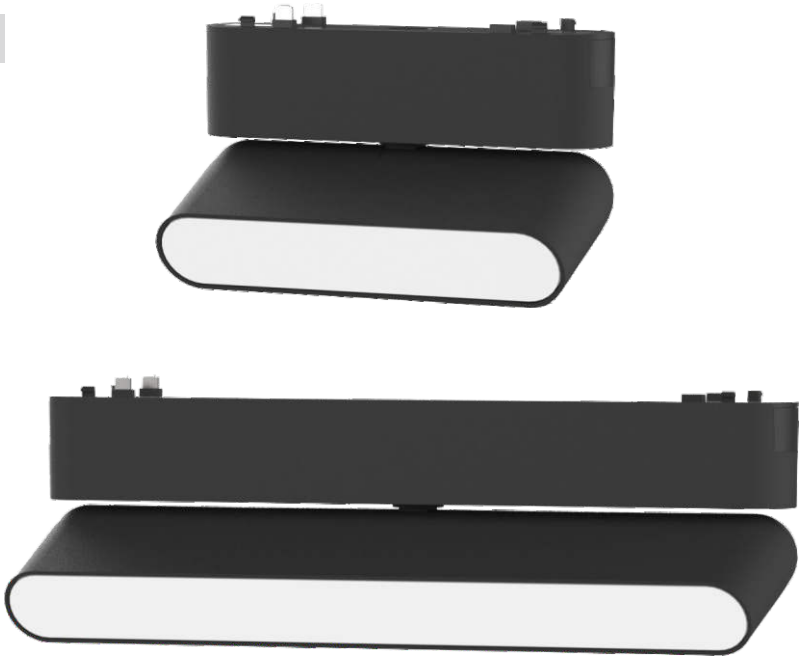

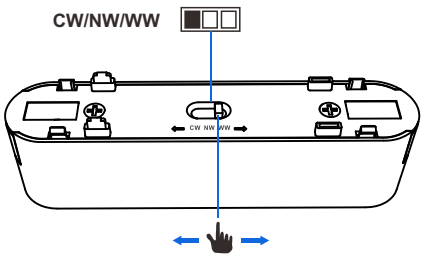




Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



PHOTOMETRIC ON REQUEST

TECHNICAL DATA


■ Matt Black □ Matt White

Model	Size LxWxH	Power	Input Voltage		CRI
TR25-ZD-F6W	120x25x81mm	6W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-ZD-F12W	235x25x81mm	12W	DC48V	3000K/4000K/6000K	Ra≥90

TR 25 Folding Grille Light


SYSTEM OPTIONS On/off | zigbee | Bluetooth


Switch adjutment CCT: CW | N W | W W

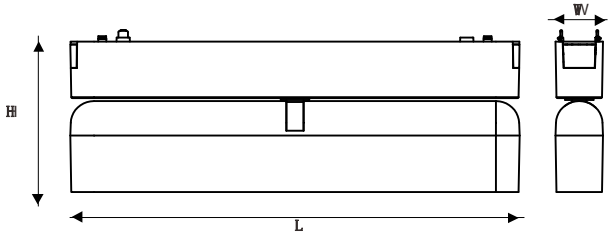








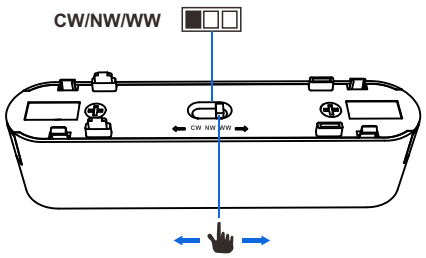

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



PHOTOMETRIC ON REQUEST


TECHNICAL DATA ■ Matt Black □ Matt White

Model	Size LxWxH	Power	Input Voltage	CCT	CRI
TR25-ZD-G6W	120x25x81mm	6W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-ZD-G12W	235x25x81mm	12W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Track Spotlight Zoomable

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

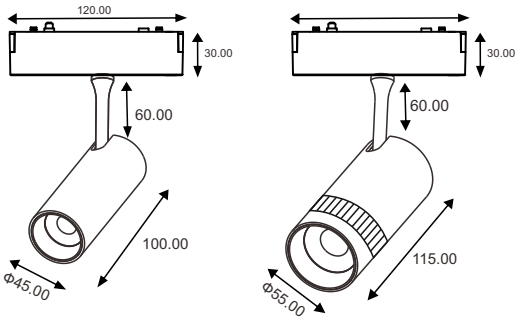




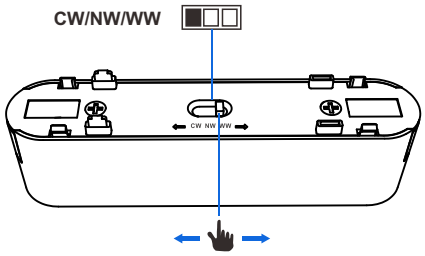

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



TECHNICAL DATA


■ Matt Black □ Matt White


Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-S10W	ф45x100mm	10W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-TJ-S10W	ф55x115mm	10W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Track Tubo light

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

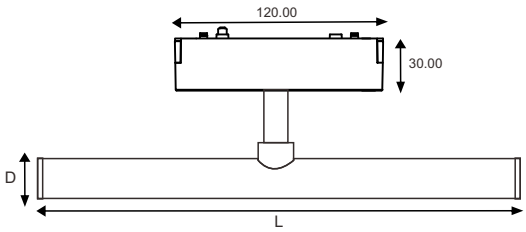

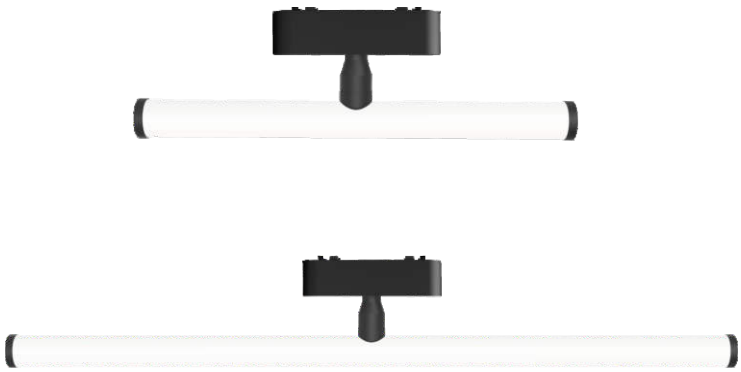


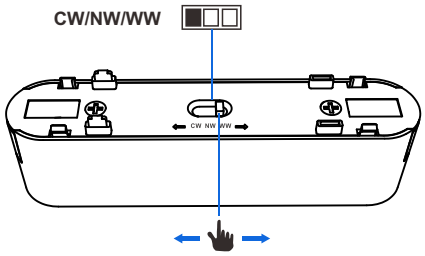

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



TECHNICAL DATA


■ Matt Black □ Matt White

Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-DG10W	ф25x300mm	10W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-DG20W	ф25x600mm	20W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Track Hose light

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

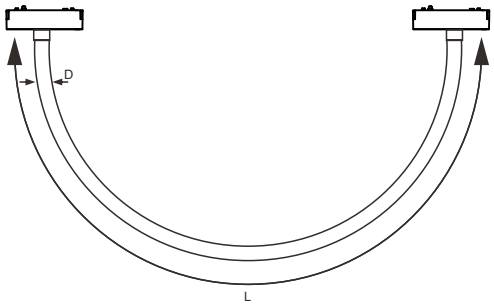



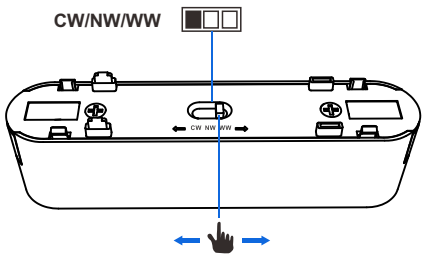


Beam angle



360°

The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

TECHNICAL DATA


■ Matt Black □ Matt White

Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-RG10W	ф25x1000mm	10W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-RG20W	ф25x2000mm	20W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Track Wall Lamp

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W






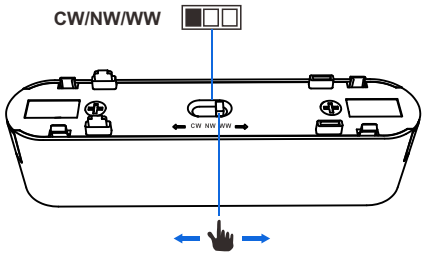

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

TECHNICAL DATA


■ Matt Black □ Matt White

Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-YS10W	ф70x65mm	10W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Pendant Zoomable

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W






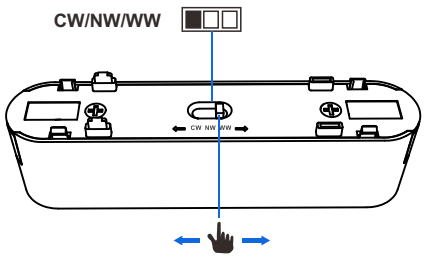

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST


TECHNICAL DATA ■ Matt Black □ Matt White


Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-TJ-PG10W	ф100x100mm	10W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Pendant Light

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

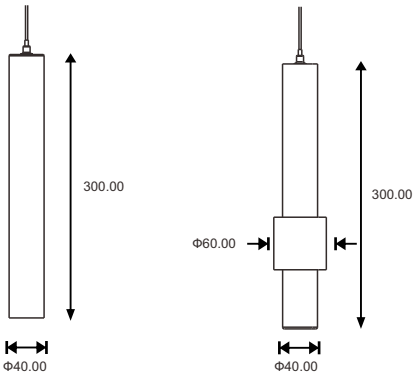

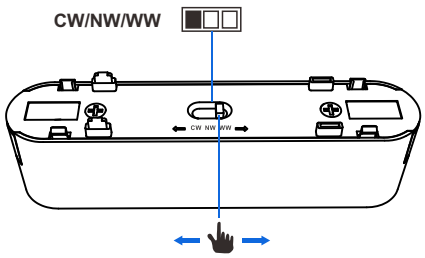


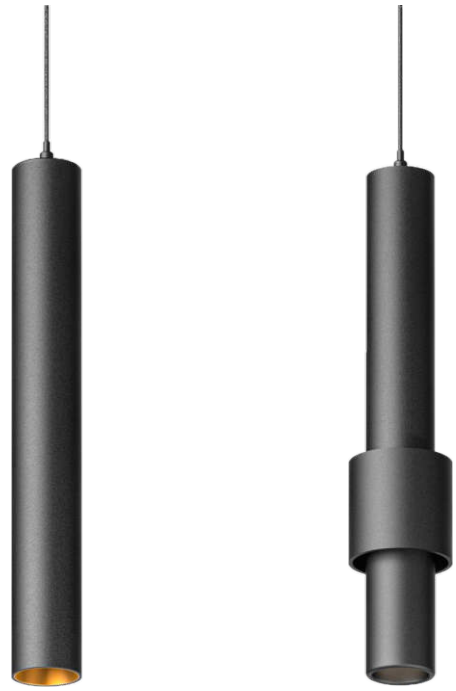

Beam angle



The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



PHOTOMETRIC ON REQUEST


TECHNICAL DATA ■ Matt Black □ Matt White

Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-DX6W	ф40x300mm	6W	DC48V	3000K/4000K/6000K	Ra≥90
TR25-SJ-DX6W	ф60x300mm	6W	DC48V	3000K/4000K/6000K	Ra≥90


TR 25 Pendant Light Zoomable

SYSTEM OPTIONS On/off | zigbee | Bluetooth

Switch adjutment CCT: CW | N W | W W

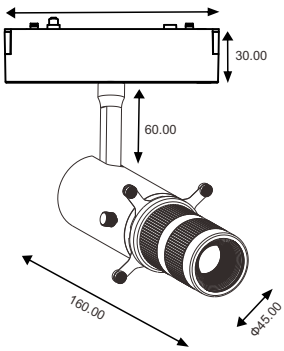



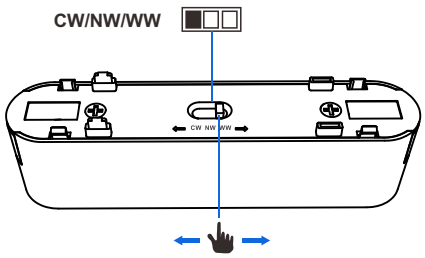


Beam angle



20-35°

The Linear Fixed Spot Light Ultra Slim Magnetic Track Light, available in 6, 12, and 18 watts, delivers focused illumination with a sleek, minimalist design. Its magnetic mounting system allows for easy installation and repositioning, making it perfect for accenting artwork or highlighting specific areas in modern residential or commercial settings.



H(m)	E(lx)	D(cm)
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

PHOTOMETRIC ON REQUEST

TECHNICAL DATA

■ Matt Black □ Matt White

Model	Size DxL	Power	Input Voltage	CCT	CRI
TR25-FG10W	ϕ45x160mm	10W	DC48V	3000K/4000K/6000K	Ra≥90

OBEN

IP RATING CHART

Ingress Protection (IP) Ratings gauges the protection of mechanical casings and electrical enclosures against intrusion, dust, accidental contact, and water.

IP Ratings are determined by combining one digit from each of the two columns below.

SOLIDS

1 Protected against a solid object greater than 50mm, such as a hand.

2 Protected against a solid object greater than 12.5mm, such as a finger.

3 Protected against a solid object greater than 2.5mm, such as a screwdriver.

4 Protected against a solid object greater than 1mm, such as a wire.

5 Dust Protected.
Limited ingress of dust permitted. Will not interfere with operation of the equipment.
2-8 hours

6 Dust tight. No Ingress of dust.
2- 8 hour

LIQUIDS

1 Protected against vertically falling drops of water.
Limited ingress permitted.

2 Protected against vertically falling drops of water with enclosure tilted up to 15º from the vertical.
Limited ingress permitted.

3 Protected against sprays of water with enclosure tilted up to 60º from the vertical.
Limited ingress permitted for 3 minutes.

4 Protected against water splashed from all directions.
Limited ingress permitted.

5 Protected against jets of water.
Limited ingress permitted.

6 Water from heavy seas or water projected in powerful jets will not enter the encloure in harmful quantities.

7 Protection against the effects of immersion in water between 15cm and 1m for 30 minutes.

8 Protection against the effects of immersion in water under pressure for long periods.

Rating Example:

IP 65

Ingress Protection

IK RATING

It is the designation system to indicate the degrees of protection of the luminaire against harmful external mechanical impacts. It is indicated by the code letters [IK] and followed by characteristic group numerical [from 00 to 10]. Each characteristic group numerical represents an impact energy value as shown in table below.

Relation between IK rate and impact energy [in joules].

IK Rate	Impact energy, J	Explanation
IK 00	Non-protected	
IK 01	0.14	Resistant against an impact from an object of 200 grams thrown from a distance of 7.5 cm.
IK 02	0.2	Resistant against an impact from an object of 200 grams thrown from a distance of 10 cm.
IK 03	0.35	Resistant against an impact from an object of 200 grams thrown from a distance of 17.5 cm.
IK 04	0.5	Resistant against an impact from an object of 200 grams thrown from a distance of 25 cm.
IK 05	0.7	Resistant against an impact from an object of 200 grams thrown from a distance of 35 cm.
IK 06	1	Resistant against an impact from an object of 500 grams thrown from a distance of 20 cm.
IK 07	2	Resistant against an impact from an object of 500 grams thrown from a distance of 40 cm.
IK 08	5	Resistant against an impact from an object of 1.7 Kg. thrown from a distance of 29.5 cm.
IK 09	10	Resistant against an impact from an object of 5 Kg. thrown from a distance of 20 cm.
IK 10	20	Resistant against an impact from an object of 5 Kg. thrown from a distance of 40 cm.

Protection against electrical shock

Luminaires are classified according to the type of protection against electrical shock provided as Class I, Class II and Class III.

Class	Symbol	Explanation
Class I		Luminaire is provided for the connection of accessible conductive parts to The protective [earthing] conductor in the fixed wiring installation.
Class II		An additional protective insulation is provided apart from functional insulation. Under any fault condition, no dangerous voltage can reach metal parts
Class III		Luminaire in which protection against electrical shock relies on supply at safety extra-low voltage.



OBEN®

Smart Lighting

5 YEARS WARRANTY

LEDLUX SOLUTIONS

HEAD OFFICE & SHOWROOM
962, 7th Main, 24th Cross
MCECHS Layout,Jakkur Road,
Bangalore - 560077. Karnataka,
INDIA

ASSEMBLY UNIT I
Plot No. EL90, 1st Floor, TTC Industrial Area,
MIDC Electronic Zone, Mahape,
Navi Mumbai - 400 710.
Maharashtra, INDIA

GODOWN
191/2, 2nd Stage,
13th Cross Road, HBR Layout,
Bangalore - 560045. Karnataka,
INDIA

M: +91-99861 63633 | E: ledluxsolutions@gmail.com / info@obenindia.com | W: www.obenindia.com